

# Solutions for Power Switching and Monitoring

January  
1<sup>st</sup> 2020



When **energy** matters

When **energy** matters

**socomec**  
INNOVATIVE POWER SOLUTIONS

# UPS & Critical power solutions



## 7 solutions

- Modular UPS
- Single-phase UPS
- Three-phase UPS
- Static Transfer System (STS)
- Industrial and transformer based UPS
- UPS for special applications
- Connected services

**50** years  
of expertise

**3 levels of protection**

according to your criticality

**Prime | Superior | Ultimate**

**3** offers

Standard | Adapted | Custom

Product Name	Rating	Item code	Product Description	LP (₹)
ITYS-E	1kVA	ITY-E-TW010B-I	1KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232 with Built-in Battery	26400
	2kVA	ITY-E-TW020B-I	2KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232 with Built-in Battery	45500
	3kVA	ITY-E-TW030B-I	3KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232 with Built-in Battery	52000
	1kVA	ITY-E-TW010LB-I	1KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	23700
	2kVA	ITY-E-TW020LB-I	2KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	40000
	3kVA	ITY-E-TW030LB-I	3KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	43700
	6kVA	ITY-E-TW060LB	6KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	82000
ITYS	10kVA	ITY-E-TW100LB	10KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	106000
	10kVA	ITY2-TW110XLB	10 kVA Single phase online UPS 3/1 COMBO INPUT WITH 8A SUPER POWERFUL BATTERY CHARGER 0.9 PF, RS232, External Battery option	160000
	20kVA	ITY2-TW210XLB	20 kVA Single phase online UPS 3/1 COMBO INPUT WITH 8A SUPER POWERFUL BATTERY CHARGER 0.9 PF, RS232, External Battery option	273000
	Parallel kit (optional)	ITY2-PAR10-20	Parallel KIT FOR UPS 10-20kVA COMBO 1+1	13700
NETYS RT	5kVA	NRT2-U5000C	5000VA Single phase rack-mountable online UPS 230V 50/60Hz, RS232, External Battery option	99000
	11kVA	NRT2-U11000CLAC	11000VA Single phase rack-mountable online UPS 230V 50/60Hz, RS232, External Battery option	146000
STATYS XS	16A	3310016001	Static transfer switch 16A 230V 1P 2 WIRES 2 POLE SWITCHING (19" Rack mountable)	55000
	32A	3310032001	Static transfer switch 32A 230V 1P 2 WIRES 2 POLE SWITCHING (19" Rack mountable)	100000





\*Note: Online UPS available from 1kVA to 5400 kVA, Static transfer switches (STS) available up to 1800 A. For higher rating UPS & STS, send your query to [info.in@socomec.com](mailto:info.in@socomec.com)



# Load Break Switches

COMO

From 32 to 63A

Solution		OPEN EXECUTION							
		Din Rail/Black Plate				Door Mounting			
		 				 			
		Direct Handle Version		External Handle Version*		External operation Version* with screw		Quick Fix Version*	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
32A	3	21113003G	685	21113103G	625	21113203G	625	21113303G	625
63A	3	21113005G	825	21113105G	775	21113205G	825	21113305G	825

\* above references are only for Switch

## Accessories for Din Rail/Back Plate mounting

Rating	4th Pole	LP (₹)	External handle K1 type IP65 with Guided Shaft	LP (₹)	Extension shaft	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111003G	235	21131112G (Blue/Black)	180	21132200G (200mm)	120	21134000G	295	21111056G	295
63A	21111005G	275	21131113G (Red /Yellow)		21132320G (320mm)	165				

## Accessories for Door mounting

Rating	4th Pole	LP (₹)	External handle K1 type IP65 with Screw	LP (₹)	External handle K1 type IP65 - Quickfix	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111003G	235	21131112G (Blue/Black)	180	21131332G (Blue/Black)	180	21134000G	295	21111056G	295
63A	21111005G	275	21131113G (Red /Yellow)		21131333G (Red/Yellow)					

# Enclosed Load Break Switches

COMO

From 20 to 125A



Pole	20A		25A		32A		40A	
	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
3Pole (Yellow/Red)	21153401G	1240	21153402G	1338	21153403G	1374	21153404G	1502
3Pole (Blue/Grey)	21153301G	1240	21153302G	1338	21153303G	1374	21153304G	1502
4Pole (Yellow/Red)	21154401G	1390	21154402G	1502	21154403G	1540	21154404G	1712
4Pole (Blue/Grey)	21154301G	1390	21154302G	1502	21154303G	1540	21154304G	1712
	<b>63A</b>		<b>80A</b>		<b>100A</b>		<b>125A</b>	
Pole	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
3Pole (Yellow/Red)	21153406G	2000	21153408G	3956	21153409G	5000	21153412G	9250
3Pole (Blue/Grey)	21153306G	2000	21153308G	3956	21153309G	5000	21153312G	9250
4Pole (Yellow/Red)	21154406G	2500	21154408G	4400	21154409G	5727	21154412G	9250
4Pole (Blue/Grey)	21154306G	2500	21154308G	4400	21154309G	5727	21154312G	9250



# Load Break Switches

## SIRCO

Conforms to IS/IEC 60947-3 up to AC23A<sup>1</sup>, Front operated 3 or 4 pole 415 V, 50 Hz.

SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> <li>Switch</li> <li>Interphase barriers from frame B3 and above</li> <li>Direct Handle</li> </ul>		<ul style="list-style-type: none"> <li>Switch</li> <li>Interphase barriers from frame B3 and above</li> <li>External Handle</li> <li>Extension Shaft 200mm</li> </ul>		<ul style="list-style-type: none"> <li>Enclosure</li> <li>Switch</li> <li>Interphase barriers from frame B3 and above</li> <li>External Handle</li> <li>Extension Shaft</li> </ul>		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A		26K13012A	4198	26K23012A	4565	26E13012A	5844		
	160A		26K13016A	5314	26K23016A	5683	26E13016A	7074	26E10002A	1418
	200A CD		26K13019A	5519	26K23019A	5887	26E13019A	7273		
B4	200A		26K13020A	6038	26K23020A	6405	26E13020A	7420		
	250A		26K13025A	7846	26K23025A	8214	26E13025A	9679		
	315A CD		26K13030A	7908	26K23030A	8276	26E13030A	9758	26E10003A	2193
B5	400A CD		26K13039A	9833	26K23039A	10201	26E13039A	13541		
	315A		26K13031A	8449	26K23031A	8817	26E13031A	10944		
	400A		26K13040A	11742	26K23040A	12110	26E13040A	14953		
B6	500A		26K13050A	12878	26K23050A	13245	26E13050A	16472	26E10004A	2794
	630A	3P	26K13063A	14154	26K23063A	14523	26E13063A	17913		
	800A CD		26K13079A	16761	26K23079A	17374	-	-	-	-
B7	1000A		26K13100A	32236	26K23100A	32848	26E13100A	39072	26E10006A	8216
	1250A CD		26K13124A	36792	26K23124A	37406	-	-	-	-
	1250A		26K13125A	44063	26K23125A	44676	26E13125A	54324		
B8	1600A		26K13160A	59491	26K23160A	60104	26E13160A	71600	26E10007A	10413
	1800A		26K13180A	65613	26K23180A	66226				
	2000A		26K13200A	73862	26K23200A	75088				
B2*	2500A		26K13250A	101869	26K23250A	103096				
	3200A		26K13320A	136632	26K23320A	137858				
	63A		26K14006A	2384	26K24006A	2720	26E14006A	3268		
B3	100A		26K14010A	4088	26K24010A	4425	26E14010A	5119	26E10001A	833
	125A CD		26K14011A	4473	26K24011A	4809	26E14011A	6051		
	160A		26K14016A	6252	26K24016A	6685	26E14016A	8405		
B4	200A CD		26K14019A	6493	26K24019A	6926	26E14019A	8638	26E10002A	1418
	200A		26K14020A	7103	26K24020A	7535	26E14020A	8874		
	250A		26K14025A	9231	26K24025A	9664	26E14025A	11443		
B5	315A CD		26K14030A	9303	26K24030A	9736	26E14030A	11533	26E10003A	2193
	400A CD		26K14039A	11569	26K24039A	12297	26E14039A	15647		
	315A		26K14031A	9940	26K24031A	12001	26E14031A	12812		
B6	400A		26K14040A	13814	26K24040A	14246	26E14040A	17385		
	500A		26K14050A	15150	26K24050A	15582	26E14050A	19098	26E10004A	2794
	630A	4P	26K14063A	16652	26K24063A	17085	26E14063A	20759		
B7	800A CD		26K14079A	19719	26K24079A	20440	26E14079A	-	-	-
	1000A		26K14100A	37924	26K24100A	38646	26E14100A	45295	26E10006A	8216
	1250A CD		26K14124A	43285	26K24124A	44006	26E14124A	-	-	-
B8	1250A		26K14125A	51838	26K24125A	52559	26E14125A	62574		
	1600A		26K14160A	69989	26K24160A	70711	26E14160A	82493	26E10007A	10413
	1800A		26K14180A	77191	26K24180A	77912				
B2*	2000A		26K14200A	86896	26K24200A	88339				
	2500A		26K14250A	119846	26K24250A	121289				
	3200A		26K14320A	160743	26K24320A	162186				

CD - Compact design

<sup>1</sup>) please refer technical literature for exact technical characteristics

\* Phase Barrier & Shaft is not available in frame B2

# Rating 125A & 800A are also available in higher frame





Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)
B2	42990001A	343	NA	-	26991020A	156	26992020A	258
B3	26995042A	337	14212111A	1106	26990031A	385	26990032A	452
B4	26995052A	625	14212111A	1106	26990031A	385	26990032A	452
B5	26995052A	625	14212111A	1106	26990031A	385	26990032A	452
B6*	27997012A	2493	14433111A	1716	26990031A	385	26990032A	452
B7*	27997012A	2493	14433111A	1716	26990031A	385	26990032A	452
B8*	27997012A	2493	14538111A	2838	26990031A	385	26990032A	452

\* Handle for frames B6 to B8 are double arms handle



Frame	Shaft 200mm	LP (₹)	Shaft 250mm	LP (₹)	Shaft 320mm	LP (₹)
B3	14001020A	385	14001025A	490	14001032A	539
B4	14001020A	385	14001025A	490	14001032A	539
B5	14001020A	385	14001025A	490	14001032A	539
B6	14011520A	805	-	-	14011532A	990
B7	14011520A	805	-	-	14011532A	990
B8	27993015A	914	-	-	27993018A	2020



Frame	Interphase barrier - 3P	LP (₹)	Interphase barrier - 4P	LP (₹)	Spreaders - 3P	LP (₹)	Spreaders - 4P	LP (₹)
B2	-	-	-	-	-	-	41064012A	345
B3	29985033A	158	29985034A	228	41063016A	330	41064016A	447
B4	29985023A	187	29985024A	272	41063025A	492	41064025A	669
B5	29985013A	217	29985014A	315	41063040A (400A)	667	41064040A (400A)	906
B5	-	-	-	-	41063050A (500A)	883	41064050A (500A)	1074
B5	-	-	-	-	41063063A (630A)	1788	41064063A (630A)	2385



Frame	Terminal Shroud - 3P	LP (₹)	Terminal Shroud - 4P	LP (₹)	Terminal Screen Standard - 3P	LP (₹)	Terminal Screen Standard - 4P	LP (₹)
B2	-	-	29944008A	275	-	-	-	-
B3	26943014A	585	26944014A	682	26983012A	463	26984012A	524
B4	26943021A	649	26944021A	779	26983020A	463	26984020A	524
B5	26943051A	1039	26944051A	1169	26983050A	593	26984050A	671
B6	-	-	-	-	26983080A	1189	26984080A	1348
B7	-	-	-	-	26983120A	1763	26984120A	1998
B8	-	-	-	-	26983200A	3166	26984200A	3587



Frame	Terminal Screen Wide - Top - 3P	LP (₹)	Terminal Screen Wide - Bottom - 3P	LP (₹)	Terminal Screen wide Top/Bottom - 4P	LP (₹)
B3	26983013A	555	26988013A	555	26984013A	629
B4	26983021A	555	26988021A	555	26984021A	629
B5	26983051A	711	26988051A	711	26984051A	806
B6	26983081A	1426	26988081A	1426	26984081A	1617



# Manual Transfer Switching Equipment

## SIRCOVER

Conforms to IEC 60947-6-1 up to AC33B<sup>1</sup>, IS/IEC 60947-3 up to AC-23A<sup>1</sup>,  
Front operated 3 or 4 pole 415 V, 50 Hz.

SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> <li>Transfer switch</li> <li>Direct handle</li> <li>Bridging Bars up to 1600 A</li> <li>Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>Transfer switch</li> <li>Bridging Bars up to 1600 A</li> <li>Extended handle</li> <li>200 mm shaft</li> <li>Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>Transfer switch</li> <li>Extended handle</li> <li>Bridging Bars up to 1600 A</li> <li>Extension shaft</li> <li>Interphase barriers from frame B3 and above</li> </ul>		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	41K13013A	8197	41K23013A	8416	41E13013A	12013	41E10002A	2541
	160A		41K13016A	8829	41K23016A	9205	41E13016A	13176		
	200A		41K13020A	10728	41K23020A	11103	41E13020A	15130		
250A	41K13025A		15638	41K23025A	16013	41E13025A	20934	41E10003A	2687	
315A	41K13031A		16528	41K23031A	16903	41E13031A	21877			
400A	41K13040A		24314	41K23040A	24689	41E13040A	31993	41E10004A	3960	
500A	41K13050A		26088	41K23050A	26463	41E13050A	34567	41E10005A	4241	
B5	630A		41K13063A	28672	41K23063A	29047	41E13063A	36991		
	CD800A		41K13079A	38781	41K23079A	39157	-	-		
B6	1000A		41K13100A	73552	41K23100A	74177	41E13100A	97657	41E10006A	9429
	1250A	41K13120A	98248	41K23120A	98874	41E13120A	135694			
B7	1600A	41K13160A	115116	41K23160A	115740	41E13160A	184002	41E10007A	29684	
	2000A	41K13200A	180162	41K23200A	181412	41E13200A	237345			
B8	2500A	41K13250A	240391	41K23250A	241641	41E13250A	315706			
	3200A	41K13320A	329297	41K23320A	330547	41E13320A	413121	41E10008A	38028	
B2*	63A	41K14006A	4591	41K24006A	4979	41E14006A	7152	41E10001A	1662	
	100A	41K14010A	6170	41K24010A	6574	41E14010A	9117			
	CD125A	41K14011A	7624	41K24011A	8085	41E14011A	11346			
B3	160A	41K14016A	10288	41K24016A	10725	41E14016A	14847	41E10002A	2541	
	200A	41K14020A	12502	41K24020A	13065	41E14020A	17145			
B4	250A	41K14025A	18222	41K24025A	18842	41E14025A	23840	41E10003A	2687	
	315A	41K14031A	19259	41K24031A	19696	41E14031A	24946			
	400A	41K14040A	28332	41K24040A	29052	41E14040A	36474			41E10004A
B5	500A	41K14050A	30399	41K24050A	30836	41E14050A	39370	41E10005A	4241	
	630A	41K14063A	33410	41K24063A	33847	41E14063A	42262			
	CD800A	41K14079A	45191	41K24079A	45628	-	-			
B6	1000A	41K14100A	84883	41K24100A	85605	41E14100A	111121	41E10006A	9429	
	1250A	41K14120A	113385	41K24120A	114106	41E14120A	153640			
B7	1600A	41K14160A	134140	41K24160A	134869	41E14160A	205010	41E10007A	29684	
	2000A	41K14200A	203880	41K24200A	205295	41E14200A	270273			
B8	2500A	41K14250A	277426	41K24250A	278869	41E14250A	359567	41E10008A	38028	
	3200A	41K14320A	380028	41K24320A	381471	41E14320A	473119			

CD - Compact Design

1) please refer technical literature for exact technical characteristics

\* Phase Barrier & Shaft is not available in B2

‡ Rating 125A & 800A are also available in higher frame

# SIRCOVER Accessories

Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990002A	417	-	-	-	-	-	-
B3	41995012A	833	14212113A	1324	14001020A	385	14001032A	539
B4	41995012A	833	14212113A	1324	14001020A	385	14001032A	539
B5	41995012A	833	14212113A	1324	14001020A	385	14001032A	539
B6*	27997052A	2157	14433113A	3187	14011520A	805	14011532A	990
B7*	27997052A	2157	14433113A	3187	14011520A	805	14011532A	990
B8*	27997012A	2493	14538113A	5393	27993015A	914	27993018A	2020

\* double arms handle

Frame	Interphase barrier 3P	LP (₹)	Interphase barrier 4P	LP (₹)	1st or 2nd Aux Contact (1 NO/NC)	LP (₹)
B2	-	-	-	-	42091030A	490
B3	29985036A	321	29985038A	466	41090021A	510
B4	29985026A	362	29985028A	553	41090021A	510
B5	29985016A	443	29985018A	642	41090021A	510
B6	-	-	-	-	41090021A	510
B7	-	-	-	-	41090021A	510
B8	-	-	-	-	41090021A	510

Frame	Terminal Screen 3p	LP (₹)	Terminal Screen 4p	LP (₹)	Terminal Screen 3p wide	LP (₹)	Terminal Screen 4p wide	LP (₹)	Terminal Shroud 3P	LP (₹)	Terminal Shroud 4P	LP (₹)
B2	-	-	-	-	-	-	-	-	-	-	29944008A	275
B3	15093012A	608	15094012A	699	15093013A	730	15094013A	827	26943014A	585	26944014A	662
B4	15093025A	724	15094025A	821	15093026A	869	15094026A	964	26943021A	649	26944021A	779
B5	15093063A	1258	15094063A	1269	15093064A	1509	15094064A	1710	26943051A	1039	26944051A	1169
B6	15093080A	1456	15094080A	1600	15093081A	1747	15094081A	1981	-	-	-	-
B7	15093160A	1883	15094160A	2133	-	-	-	-	-	-	-	-

Frame	Rating	Spreaders 3P	LP (₹)	Spreaders 4P	LP (₹)	Interlock Kit*	LP (₹)
B2	63A - CD125A	-	-	41064012A	345	42590002A	361
B3	125A - 200A	41063016A	330	41064016A	447	42590003A	361
B4	250A - 315A	41063025A	492	41064025A	669	42590003A	361
	400A	41063040A	667	41064040A	906	42590003A	361
	500A	41063050A	883	41064050A	1074	42590003A	361
B5	630A - CD800A	41063063A	1788	41064063A	2385	42590003A	361

\* for external operation of Kit 1, interlock kit can be used

\* for using Interlock kit in K2, direct handle to be ordered extra



# Load Break Switches

**LBS**

Conforms to IS/IEC 60947-3 AC-23A<sup>1</sup>, Front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION	
		Load break switch	
Standard Configuration Includes			
		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Interphase barrier from 800A and above</li> <li>• Handle</li> <li>• Door Interlock</li> <li>• 1st Aux Contact from 250A and above</li> </ul>	
Rating	Poles	Reference	LP (₹)
125A*	4P	GL01254P0I	5130
200A*		GL02004P0I	7378
250A		GL02504P0I	9590
320A		GL03204P0I	10326
400A		GL04004P0I	14351
630A		GL06304P0I	17299
800A*		GL08004P0I	23515
1000A		GL10004P0I	39396
1250A*		GL12504P0I	53851
1600A*		GL16004P0I	72709
2000A		GL20004P0I	90271
2500A*		GL25004P0I	124500
3200A*		GL31504P0I	166985

<sup>1)</sup> please refer technical literature for exact technical characteristics

\* not available with Socomec, kindly contact our distributor

## LBS Accessories

Frame	Direct Handle	LP (₹)	1st Aux Contact	LP (₹)	2nd Aux Contact	LP (₹)	Door Interlock Assembly	LP (₹)	Phase Barrier Kit	LP (₹)	Shaft	LP (₹)
125A	42990003G	486	26091040G	242	26092040G	378	26590002G	350	-	-	42190003G	486
200A	42990005G	486	26091040G	242	26092040G	378	26590002G	350	-	-	42190003G	486
250A	42990006G	539	26091040G	242	26092040G	378	26590002G	350	-	-	42190003G	486
320A	42990007G	702	26091040G	242	26092040G	378	26590002G	350	-	-	42190003G	486
400A	42990008G	755	26091040G	242	26092040G	378	26590002G	350	-	-	42190003G	486
630A	42990009G	809	26091040G	242	26092040G	378	26590002G	350	-	-	42190003G	486
800A	42990010G	971	26091040G	242	26092040G	378	26590003G	675	G898765G	486	42190003G	486
1000A	42990011G	1530	26091040G	242	26092040G	378	26590003G	675	G898765G	486	42190003G	486
1250A	42990011G	1530	26091040G	242	26092040G	378	26590003G	675	G898765G	486	42190003G	486
1600A	42990011G	1530	26091040G	242	26092040G	378	26590003G	675	G898765G	486	42190003G	486
2000A	42990011G	1530	26091040G	242	26092040G	378	26590003G	675	G898143G	809	42190003G	486
2500A	42990011G	1530	26091040G	242	26092040G	378	26590003G	675	G898143G	809	42190003G	486
3150A	42990011G	1530	26091040G	242	26092040G	378	26590003G	675	G898143G	809	42190003G	486

\* 1000A and above is having double arm handle



# Changeover switches

**COS**

Conforms to IS/IEC 60947-3, AC-23A<sup>1</sup>, front operated 4 pole 415 V, 50 Hz

SOLUTION		OPEN EXECUTION	
		Switch	
Standard Configuration Includes			
		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging bars</li> <li>• Door Interlock Assembly</li> <li>• Interphase barrier from 800A and above</li> <li>• 1st Aux Contact from 250A and above</li> </ul>	
Rating	Poles	Reference	LP (₹)
125A*	4P	GC01254POI	10597
160A*		GC01604POI	11588
200A*		GC02004POI	13980
250A		GC02504POI	20161
320A*		GC03204POI	21075
400A*		GC04004POI	31085
630A		GC06304POI	36571
800A*		GC08004POI	52667
1000A		GC10004POI	88929
1250A		GC12504POI	118538
1600A		GC16004POI	140106
2000A*		GC20004POI	213268
2500A*		GC25004POI	289699
3150A*		GC31504POI	396286

\* Please refer technical literature for exact characteristics  
 \* not available with Socomec, please consult local distributor

## COS Accessories\*



Rating	Direct Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)	Door Interlock Assembly	LP (₹)	Phase Barrier Kit Small	LP (₹)	Phase Barrier Kit Long	LP (₹)	Shaft	LP (₹)
125A	42990003GI	486	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
160A	42990004GI	486	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
200A	42990005GI	486	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
250A	42990006GI	539	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
320A	42990007GI	702	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
400A	42990008GI	755	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
630A	42990009GI	809	42091040GI	405	42092040GI	699	42590003GI	378	-	-	-	-	42190003GI	486
800A	42990010GI	971	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B143GI	809	42190003GI	486
1000A	42990011GI	1530	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B143GI	809	42190003GI	486
1250A	42990011GI	1530	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B143GI	809	42190003GI	486
1600A	42990011GI	1530	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B143GI	809	42190003GI	486
2000A	42990011GI	1530	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B491GI	1025	42190003GI	486
2500A	42990011GI	1530	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B491GI	1025	42190003GI	486
3200A	42990011GI	1530	42091050GI	567	42092060GI	777	42590004GI	594	G89B136GI	486	G89B491GI	1025	42190003GI	486

\* 1000A and above is having double arm handle  
 \* these are available till stock lasts.







# Bypass changeover switches

## BPCOS

Conforms to IES/IEC 60947-3 AC-23A<sup>1</sup>, front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION			
		SIRCORDER BYPASS		BPCOS	
Standard Configuration Includes					
		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Interphase barrier</li> <li>• External Handle</li> <li>• Bridging Bars</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Interphase barrier from 800A and above</li> <li>• Direct Handle</li> <li>• Bridging Bars</li> <li>• 1st Aux Contact from 250A and above</li> </ul>	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
125A	4P	41K29013A	16758	GBP01254POI*	16758
160A		41K29016A	17610	-	-
200A		41K29019A	20003	GBP02004POI*	20003
250A		41K29025A	28912	GBP02504POI	28912
320A		-	-	GBP03204POI*	29490
400A		41K29039A	44749	GBP04004POI*	44749
500A		41K29050A	48127	-	-
630A		41K29063A	50480	GBP06304POI	50480
800A		41K29080A	113015	GBP08004POI*	69485
1000A		41K29100A	161002	GBP10004POI	118733
1250A		41K29120A	169476	GBP12504POI	169476
1600A		41K29160A	234111	GBP16004POI	234111

1) Please refer technical literature for exact characteristics

\* BPCOS 125A to 800A not available with Socomec, please consult local distributor

† Rest of the ratings in this product family also available till stock last

## BPCOS Accessories

### Sircorder Bypass

Rating								
	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)	1st Aux Contact (1NO/NC)	LP (₹)
125A	14212113A	1324	14001020A	385	14001032A	539	41090021A	510
160A	14212113A	1324	14001020A	385	14001032A	539	41090021A	510
200A	14212113A	1324	14001020A	385	14001032A	539	41090021A	510
250A	14333113A	2542	14011520A	805	14011532A	990	41090021A	510
400A	14333113A	2542	14011520A	805	14011532A	990	41090021A	510
500A	14333113A	2542	14011520A	805	14011532A	990	41090021A	510
630A	14333113A	2542	14011520A	805	14011532A	990	41090021A	510
1250A	41997146A	2542	27993015A	914	27993018A	2020	41090021A	510
1600A	41997146A	2542	27993015A	914	27993018A	2020	41090021A	510

### BPCOS

Rating								
	Direct Handle	LP (₹)	Door Lock Assembly	LP (₹)	1st AUX Contact (1NO/NC)	LP (₹)	2nd AUX Contact (1NO/NC)	LP (₹)
125A	41990001G	1117	42590003G	378	42091040G	405	42092040G	699
200A	41990002G	1117	42590003G	378	42091040G	405	42092040G	699
250A	41990003G	1117	42590003G	378	42091040G	405	42092040G	699
320A	41990004G	1117	42590003G	378	42091040G	405	42092040G	699
400A	41990005G	1117	42590003G	378	42091040G	405	42092040G	699
630A	41990006G	1117	42590003G	378	42091040G	405	42092040G	699
800A	42990011G	1530	42590004G	594	42091050G	567	42092060G	777
1000A	42990011G	1530	42590004G	594	42091050G	567	42092060G	777
1250A	42990011G	1530	42590004G	594	42091050G	567	42092060G	777
1600A	42990011G	1530	42590004G	594	42091050G	567	42092060G	777

# When it comes to transfer switching equipment, opt for reliability



## from 40 to 6300 A



**ATyS:** a complete range of transfer switching equipment for every application from 40 to 6300 A

ATyS is remotely operated or fully automatic transfer switching equipment (TSE) assures the continuity of power to a load in a safe and reliable way.

- **Wider range of ATyS products** for different applications. With or without dual power supply, ATS controller, Communication, Software and more.
- **Tested in full compliance** with IEC 60947-6-1 & IEC 60947-3.
- **Unique lateral movement design** with self cleaning contacts ensure high performance and power availability.
- **Wide band control voltage** 166 - 332 V for motor.
- **Self diagnostic watchdog relay** for the motor and controller.
- **3-positions (I-0-II) pad lockable** with 100% manual on-load transfer feasibility with operating handle.



Safe



Plug & play



Robust



Easy maintenance

To find out more:



[www.socomec.co.in](http://www.socomec.co.in)





**socomec**  
Innovative Power Solutions







# Remote & Automatic operated transfer switches

**ATyS**

Conforms to IEC 60947-6-1, IS/IEC 60947-3, 4 pole

SOLUTION		Remotely Operated							
		ATyS S		ATyS Sd		ATyS S 12Vdc		ATyS S 24Vdc	
Standard Configuration Includes									
		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars</li> <li>• Dual Power Supply</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars</li> </ul>	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	95034004SL	19083	95134004SL	21182	95054004SL	19083	95064004SL	21202
63A		95034006SL	20146	95134006SL	22145	95054006SL	19951	95064006SL	22168
80A		95034008SL	21685	95134008SL	24071	95054008SL	21685	95064008SL	24095
100A		95034010SL	24525	95134010SL	26959	95054010SL	24287	95064010SL	26986
125A		95034012SL	26277	95134012SL	28885	95054012SL	26022	95064012SL	28913

SOLUTION		Remote Operated		Automatic Transfer Switch Equipment ( ATSE )					
		ATyS d M		ATyS t M		ATyS g M		ATyS p M	
Image = 4P B4 Frame									
Standard Configuration Includes		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Aux Contact</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> </ul>	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93234004G	34183	93444004G	35513	93544004G	On Request	93644004G	On Request
63A		93234006G	36391	93444006G	37513	93544006G	On Request	93644006G	On Request
80A		93234008G	38741	93444008G	39514	93544008G	On Request	93644008G	On Request
100A		93234010G	38867	93444010G	40514	93544010G	On Request	93644010G	On Request
125A		93234012G	43827	93444012G	44766	93544012G	On Request	93644012G	On Request
160A		93234016G	52714	93444016G	54520	93544016G	On Request	93644016G	On Request

\* Please consult us, for 2Pole ATyS M





\* These products are DIN rail mountable, please refer to catalogue for more information



# Remote & Automatic operated transfer switches

**ATyS**

Conforms to IEC 60947-6-1, IEC 60947-3, 4 pole

SOLUTION		Remotely Operated		Automatically operated					
		ATyS r		ATyS t		ATyS g		ATyS p	
Standard Configuration Includes									
		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars up to 1600A</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars up to 1600A</li> <li>• Voltage Sensing Kit</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars up to 1600A</li> <li>• Voltage Sensing Kit</li> </ul>		<ul style="list-style-type: none"> <li>• Switch</li> <li>• Handle</li> <li>• Bridging Bars up to 1600A</li> <li>• Voltage Sensing Kit</li> </ul>	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
125A	4P	95234012SL	48546	95434012SLVR	73418	95534012SLVR	On Request	95734012SLVR	On Request
160A		95234016SL	49790	95434016SLVR	80564	95534016SLVR	On Request	95734016SLVR	On Request
200A		95234020SL	50973	95434020SLVR	88480	95534020SLVR	On Request	95734020SLVR	On Request
250A		95234025SL	63593	95434025SLVR	96396	95534025SLVR	On Request	95734025SLVR	On Request
315A		95234031SL	64579	95434031SLVR	105468	95534031SLVR	On Request	95734031SLVR	On Request
400A		95234040SL	80354	95434040SLVR	114541	95534040SLVR	On Request	95734040SLVR	On Request
500A		95234050SL	86269	95434050SLVR	129740	95534050SLVR	On Request	95734050SLVR	On Request
630A		95234063SL	102044	95434063SLVR	144939	95534063SLVR	On Request	95734063SLVR	On Request
800A		95234080SL	139203	95434080SLVR	201579	95534080SLVR	On Request	95734080SLVR	On Request
1000A		95234100SL	168102	95434100SLVR	207789	95534100SLVR	On Request	95734100SLVR	On Request
1250A		95234120SL	208525	95434120SLVR	242850	95534120SLVR	On Request	95734120SLVR	On Request
2500A		95234160SL	258807	95434160SLVR	313080	95534160SLVR	On Request	95734160SLVR	On Request
2000A		95234200V	377917	95434200VR	401748	95534200VR	On Request	95734200VR	On Request
3200A		95234250V	417705	95434250VR	442080	95534250VR	On Request	95734250VR	On Request
3200A		95234320V	537016	95434320VR	563020	95534320VR	On Request	95734320VR	On Request

# Please contact us for 3Pole ATyS range

\* For rating 4000A to 6300A - Prices are available on request

**ATyS Accessories**



References	Description	LP (₹)
95992010G	HMI ATyS D10 compatible with C30, ATyS d, t, g, p	6184
95992020G	HMI ATyS D20 compatible with C30, ATyS p, ATyS p M	6957
15993020G	ATS CONTROLLER ATyS C20 for RTSE products	16633
15993030G	ATS CONTROLLER ATyS C30 for RTSE products	19417
13094006G	Bridging bars 40A - 125A for ATyS M	3538
13094016G	Bridging bars 160A for ATyS M	6804
13090001G	1st Auxiliary contact 40 - 160 A for ATyS M with 1 C/O contact for position 1,0&II	3507
13994006G	Voltage sensing tap for ATyS M	2911
22944016G	Terminal Shrouds for ATyS M	686
48250204G	Ethernet Module with RS 485 for ATyS p/DirisA40/41(MODBUS gateway & with Embedded Webserver)	30669
48250203G	Ethernet Module for ATyS p/DirisA40/41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	15369
48250092G	RS 485 Modbus Communication for ATyS p/DirisA40/41	3997
15992001G	2 inputs/ Output modules for ATyS p	7214
15994001G	Dual Power Supply for ATyS S & ATyS r	11521





SO expert



www.socomec.co.in

## Optimise your energy performance with Socomec

### Metering

Measurement and monitoring multi-circuit system  
**DIRIS Digiware**



Single-circuit energy meters  
**COUNTIS E**



### Measure

Measurement and monitoring multi-circuit system  
**DIRIS Digiware**




Single-circuit measurement units  
**DIRIS A**



Single & Three phase energy meters  
**COUNTIS M**



Electrical network analyser  
**DIRIS Q800**



### Centralise / Monitor / Analyse

Communication gateway  
**DIRIS G**



Energy management software  
**WEBVIEW**



24/7 ExpertCare Center  
1860 425 1000



www.socomec.co.in

**socomec**  
Innovative Power Solutions

SOCOMECH INDIA PRIVATE LIMITED - 756, Pace City - II Sector 37 Gurgaon-122002, Haryana, India  
Tel. +91 44 3921 5486 - Mobile : +91 9711229993 - Email: info.in@socomec.com - CIN: U00000HR1999PTC038504



# Measurement and energy management



## COUNTIS (LCD Display)



References	Description	LP (₹)
48503019G	COUNTIS E00 1PH Direct 32A Active Energy Meter, 1 Module width (18 mm) with vertical LCD display	5700
48503039G	COUNTIS E03 1PH Direct 40A Active Energy Meter, 1 Module width (18 mm) with vertical LCD display with MODBUS	7483
48503000G	COUNTIS E10 1PH Direct 63A Active Energy Meter with pulse output	8193
48503001G	COUNTIS E11 1PH Direct 63A Dual tariff, Active Energy Meter with pulse output	8736
48503043G	COUNTIS E13 1PH Direct 80A Dual tariff, Active Energy Meter with MODBUS	17680
48503047G	COUNTIS E17 1PH Direct 80A Dual tariff, Active Energy Meter with Ethernet	29521
48503003G	COUNTIS E20 3PH Direct 63A Active Energy Meter with pulse output	12536
48503004G	COUNTIS E21 3PH Direct 63A Dual tariff, Active Energy Meter with pulse output	13502
48503050G	COUNTIS E23 3PH Direct 80A Dual tariff, Active Energy Meter with MODBUS	23582
48503054G	COUNTIS E27 3PH Direct 80A Dual tariff, Active Energy Meter with Ethernet	39776
48503005G	COUNTIS E30 3PH Direct 100A Active Energy Meter with pulse output	16089
48503006G	COUNTIS E31 3PH Direct 100A Dual tariff, Active Energy Meter with pulse output	16580
48503012G	COUNTIS E33 3PH Direct 100A Dual tariff, Active Energy Meter with MODBUS	25445
48503008G	COUNTIS E40 3PH Active Energy Meter via CT/5A upto 6000 A	11178
48503009G	COUNTIS E41 3PH Dual Tariff Active Energy Meter via CT/5A upto 6000 A	12363
48503017G	COUNTIS E43 Dual Tariff Active Energy Meter via CT/5A upto 6000 A & with RS485	22209
48503016G	COUNTIS E63 3x1PH Direct 100A Active Energy Meter & with RS485	25600
48530000G	COUNTIS ED2 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs	23728
48530001G	COUNTIS ED3 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs+ 2 Analog inputs	27285

## COUNTIS 'M' Series



References	Description	LP (₹)
48C03018	Countis M03 : 45A direct - with Modbus communication via RS485; I.V.P.O.S. PF & 2Pulse Output	5350
48C03019	Countis M13 : 100 A direct - with MODBUS communication via RS485; I.V.P.O.S. PF & 2Pulse Output	5500
48C03020	Countis M33 : 100 A direct - with MODBUS communication via RS485; I.V.P.O.S. PF, load curves and THD & 2Pulse Output	8435
48C03021	Countis M43 : CT 5A input with RS485 MODBUS communication; I.V.P.O.S. PF, load curves and THD & 2Pulse Output	9350

## MULTIS "m" Series: (LED/LCD display)



References	Description	LP (₹)
192.J9024G*	Multis I15, Ammeter, 1ph, single line 5A, class 1	1020
192.J9025G	Multis I15, Ammeter, 1ph, single line 1A, class 1	1020
192.J9026G*	Multis I35, Ammeter, 3 ph/4w, single line, 5A class 1	1496
192.J9027G*	Multis I35, Ammeter, 3 ph/4w, single line, 1A class 1	1496
192.J9014G	Multis V15, Voltmeter, 1ph, single line, class 1	1020
192.J9015G*	Multis V35, Voltmeter, 3 ph/4w, single line, class 1	1496
192.J9101G*	Multis L25, class 1, V, A, F, 3 line display	3101
192.J9114G*	Multis L35, class 1. Dual source energy meter, LCD Display of PE, PFI, V, Thd V & I, Max I, Kva, KW, with RS 485	4579
192.J9113G	Multis L42, class 1, AC Energy meter, LCD display of kWh with RS 485 & thro comm. (E, P, PF, I, Max I, Kva, KW)	4307
192.J9112G*	Multis L46, class 1, AC, 3 line display, V, A, F, P, O, S, E, Max KW with RS485 port	8486
192.J9120G	Multis L50, CI-1 LCD VAFPE with THD. Optional RS485 & IN/OUT modules	11020
192.J9200G	Multis L55, class 1, AC, 3 line display, V, A, F, P, PF, max kW with THD with maximum demand indication. Built in RS485 port	14053
192.J9201G*	Multis L56, class 1, AC, 3 line display, V, A, F, P, PF, max kW with THD with maximum demand indication. Built in RS485 port	16093
192.J9023G*	Multis Im15, Ammeter, 1ph, single line Programmable 1A/5A, class 1	1173
192.J9028G	Multis Im35, Ammeter, 1ph, single line Programmable 1A/5A, class 1	1683
192.J9013G	Multis V15, Voltmeter, 1ph, single line, class 1 Programmable (110V to 600Vac)	1173
192.J9016G*	Multis V35, Voltmeter, 1ph, single line, class 1 Programmable (110V to 600Vac)	1683
192.J9100G	Multis L24, class 1, V, A, F, Meter	2397
192.J9104G*	Multis L35, class 1. Dual source energy meter, LCD Display of PE, PFI, V, Thd V & I, Max I, Kva, KW	3825
192.J9103G	Multis L42, class 1, AC Energy meter, LCD display of kWh +, -, I, reversal, Ph rotation Error & Phase absent	3621
192.J9111G	Multis L45, class 1, AC, 3 line display, V, A, F, P, O, S, E, Max KW	7650

P-Active Power(KW), Q-Reactive Power(KVAR), S-Apparent Power(KVA), E-Active Energy(KWh)

Multis Range : Available till stock lasts

\* Not available with Socomec, kindly contact our distributor

# Measurement and energy management

**DIRIS (with LCD multiline display with accuracy class upto 0.5s)**

References	Description	LP (₹)
48250010G	DIRIS A10 W/O RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDI & V, Dual source	12645
48250011G	DIRIS A10 With RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDI & V, Dual source	15308
48250200G	DIRIS A20, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, max kW, kVA, kVAR, THDI & V up to 50th row	13353
48250080G	1 OUT A20 module	3159
48250082G	RS485 A20 module	3274
48250403G	DIRIS A30 class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, kWh, max & Avg(I, V, PF, kW, kVA, kVAR), THDI, V & I up to 63rd row, 3ph current bar graph	15980
48250500G	Diris A40 RS485, 3I 20, CI 0.2 V, I, F, P, Q, S, PF, kWh, kVARh, kWh, max & Avg(I, V, PF, kW, kVA, kVAR), THDI, V & I up to 63rd row, PQM Device for Voltage Sag, Swell & Current rise recordings	34320
48250501G	Diris A40 Ethernet, 3I 20, CI 0.2 V, I, F, P, Q, S, PF, kWh, kVARh, kWh, max & Avg(I, V, PF, kW, kVA, kVAR), THDI, V & I up to 63rd row, PQM Device for Voltage Sag, Swell & Current rise recordings, webserver function inbuilt	41076
48250502G	Diris A40 Profibus, 3I 20, CI 0.2 V, I, F, P, Q, S, PF, kWh, kVARh, kWh, max & Avg(I, V, PF, kW, kVA, kVAR), THDI, V & I up to 63rd row, PQM Device for Voltage Sag, Swell & Current rise recordings	42300
48250202G	DIRIS A41, features same as DIRIS A30 + actual neutral current measurement through 4th CT	30652
48250207G	DIRIS A 60, features same as DIRIS A30 + PQM Device for Voltage Sag, Swell & Current rise recordings	59108
48250090G	2 Pulse A30/A41 module	3136
48250092G	RS 485 Modbus Communication for ATyS p/Diris A30/41	3997
48250093G	2 0/4-20mA Analog Output module A30/A41	8046
48250094G	2IN/2OUT A30/A41 module for alarm/trip purposes for Max V, I, F, P, Q, S, Temp, THD, V & I parameters	5815
48250097G	MEMORY A30/A41 module with RTC & with storage for P+, P-, Q+, Q-, last Max/Min values for V, I, F, P, Q, THD, V & I	12405
48250203G	Ethernet Module for ATyS p/Diris A30/41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	15369
48250204G	Ethernet Module with RS 485 for ATyS p/Diris A30/41 (MODBUS gateway & with Embedded Webserver)	30669
48250205G	PROFIBUS-DP A30 module	15076
48250206G	Temperature module - Temp indication (Internal+3 External sensors PT 100)	14128

\* Upto max 4 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

\*\* Upto max 3 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

## DIRIS G

RS 485 to Ethernet communication gateways

References	Description	LP (₹)
48290300	Diris G 30 RS485/Ethernet - Webview Power Monitoring	On request
48290302	Diris G 50 RS485/Ethernet - Webview Power & Energy Monitoring	On request

## DIRIS Q800

References	Description	LP (₹)
48260100	Diris Q800 Electrical network analyser with 192 x 144 mm color touchscreen for power quality/flicker/transient measurements/current waveform/Fresnel diagram	On request

# DIRIS Digeware

Measurement and monitoring system for electrical installations



## MONITORING DEVICES & MODULES

References	Description	LP (₹)
48290010	DIRIS B-10 RS485-MODBUS-230VAC	On request
48290000	DIRIS B-30 RS485-MODBUS-230VAC	
48290030	DIRIS O-isd DIGITAL MODULE	
48290031	DIRIS O-isa 0/4-20mA MODULE	
48290032	DIRIS O-it TEMPERATURE MODULE	
48290033	DIRIS O-m MODBUS RS485 MODULE	
48290034	DIRIS O-p PROFIBUS DP MODULE	
48290035	DIRIS O-b/ip BACNET MODULE	
48290036	DIRIS O_b/mstp BACNET MODULE	



## POWER SUPPLY

References	Description	LP (₹)
48290120	P15 AUX SUPPLY 100-240VAC~24 VDC 15W	On request
47290603	P30 AUX SUPPLY 100-240VAC~24 VDC 30W	

## DIRIS G GATEWAY

References	Description	LP (₹)
48290300	DIRIS G-30 RS/ETH MONITORING	On request
48290302	DIRIS G-50 RS/ETH MONIT +REPORT	



## DISPLAY

References	Description	LP (₹)
48290200	DIRIS D-30 Single-point display	On request
48290199	DIRIS D-40 Multi-point display - RS485 output	
48290204	DIRIS D-50 Multi-point display - Ethernet output - Dual channel input (Digibus & modbus)	
48290203	DIRIS D-70 Multi-point display - Webview Webserver - Ethernet output	

## BLIND INTERFACE & REPEATER

References	Description	LP (₹)
48290101	C-31 SYSTEM INTERFACE	On request
48290103	C-32 REPEATER	

## VOLTAGE SENSING MODULE

References	Description	LP (₹)
48290105	U-10 VOLTAGES INPUTS METERING	On request
48290106	U-20 VOLTAGES INPUTS MONITORING	
48290102	U-30 VOLTAGES INPUTS ANALYSIS	

## CLOSED TYPE CURRENT SENSOR

References	Description	LP (₹)
48290500	TE-18 20A SOLID CORE	On request
48290501	TE-18 63A SOLID CORE	
48290502	TE-25 160A SOLID CORE	
48290503	TE-35 250A SOLID CORE	
48290504	TE-45 630A SOLID CORE	
48290505	TE-55 1000A SOLID CORE	
48290506	TE-90 2000A SOLID CORE	



## OPEN TYPE CURRENT SENSOR

References	Description	LP (₹)
48290551	TR-10 75A/100MV SPLIT CORE	On request
48290552	TR-16 100A/100MV SPLIT CORE	
48290553	TR-24 200A/100MV SPLIT CORE	
48290554	TR-36 600A/100MV SPLIT CORE	



# Measurement and energy management

## CURRENT SENSING MODULE



References	Description	LP (₹)
48290110	I-30 3xI METERING	On request
48290111	I-31 3xI METERING + TREND	
48290112	I-60 6xI METERING	
48290113	I-61 6xI METERING + TREND	
48290128	I-33 3xI MONITORING	
48290130	I-35 3xI ANALYSIS	
48290129	I-43 4xI MONITORING 2I/2O	
48290131	I-45 4xI ANALYSIS 2I/2O	

## FLEXIBLE CURRENT SENSOR



References	Description	LP (₹)
48290570	TF-55 600A ROGOWSKI	On request
48290571	TF-120 2000A ROGOWSK	
48290572	TF-300 6000A ROGOWSKI	

## RJ45 CABLES



References	Description	LP (₹)
48290181	RJ45-0.32 feet / 0.10m CABLE	On request
48290188	RJ45-0.64 feet / 0.20m CABLE	
48290182	RJ45-1.64 feet / 0.50m CABLE	
48290183	RJ45-3.28 feet / 1m CABLE	
48290184	RJ45-6.56 feet / 2m CABLE	
48290186	RJ45-16.4 feet / 5m length CABLE	
48290187	RJ45-32.8 feet / 10m length CABLE	
48290185	RJ45 cables for BUS Digivare 164 feet / 50 m + 50 connectors	

## RJ12 CABLES



References	Description	LP (₹)
48290580	RJ12 3x0.1m CABLE	On request
48290581	RJ12 3x0.2m CABLE	
48290582	RJ12 3x0.3m CABLE	
48290583	RJ12 3x1m CABLE	
48290584	RJ12 3x2m CABLE	
48290585	RJ12 4x0.1m CABLE	
48290586	RJ12 4x0.2m CABLE	
48290587	RJ12 4x0.3m CABLE	
48290588	RJ12 4x1m CABLE	
48290589	RJ12 4x2m CABLE	
48290590	RJ12 6x0.1m CABLE	
48290591	RJ12 6x0.2m CABLE	
48290592	RJ12 6x0.3m CABLE	
48290593	RJ12 6x1m CABLE	
48290594	RJ12 6x2m CABLE	
48290595	RJ12 3x0.5m CABLE	
48290596	RJ12 4x0.5m CABLE	
48290597	RJ12 6x0.5m CABLE	
48290602	RJ12 1 cable of 16.6ft/5m	
48290603	RJ12 1 cable of 32.8ft/10m	
48290601	RJ12 1 Cable of 164ft/50m and 50 connectors	

## ACCESSORIES

References	Description	LP (₹)
48290049	SEALING KIT DIRIS B30	On request
48290050	USB CONFIGURATION CABLE	
48290180	END LINE RESISTANCE RJ45	
48290598	SPLICE PLATE x30	
48290599	CT/5A to 100 MV ADAPTOR	
48290600	SEALABLE COVER x20	
48290280	RJ9 1x1,5m	
48290281	RJ9 1x3m	

# SOCOMEK India

## General terms and conditions

### 1. PRICES

All Prices are mentioned in Indian Rupees. Prices are subjected to change without any prior notice and will be applicable as prevailing at the time of Dispatch. This Price list is effective from Jan 1<sup>st</sup> 2020 and supersedes any previous price list.

### 2. TAXES & DUTIES

The prices are exclusive of all taxes

We will charge applicable Goods and Services Tax ("GST") on our supplies

In the event of variations in rate of tax, rules and/or method of assessment under the GST, the prices will be adjusted accordingly.

It will be the responsibility of customer to communicate its correct GSTIN to the Company. Company will not be responsible in case incorrect GSTIN is communicated to us and tax is deposited by us on GSTIN available in Company's record


### 3. WARRANTY

The Company warrants the goods against all proven defects or hidden defects in design and manufacturing. The period of warranty is 12 months from date of invoicing or 18 months from date of manufacturing. The warranty shall be strictly limited to Socomec products and does not extend to the equipment within which these products may be integrated or not to the performance of such equipment. The Company's warranty shall be limited, in its discretion, to the repair or replacement at its expense in its factory of all part of the goods recognized as defective. Defective items replaced free of charge shall be made available to the company and shall become its property. The warranty shall not be applicable:

- 3.1 In the event that the defect is due to the material supplied by the buyer, or due to design imposed by it.
- 3.2 In the event of damage or accident due to the transport or arising from negligence, defective installation, supervision or maintenance by the buyer or a third party.
- 3.3 In the event of use, installation or storage of the goods in abnormal conditions which are not in compliance.
- 3.4 In the event of any changes, adjustments or repairs carried out by buyer without express agreement of the company.

The warranty does not cover the replacement or repair of items which are due to the fault of the buyer or third party.

### Our Service Partners

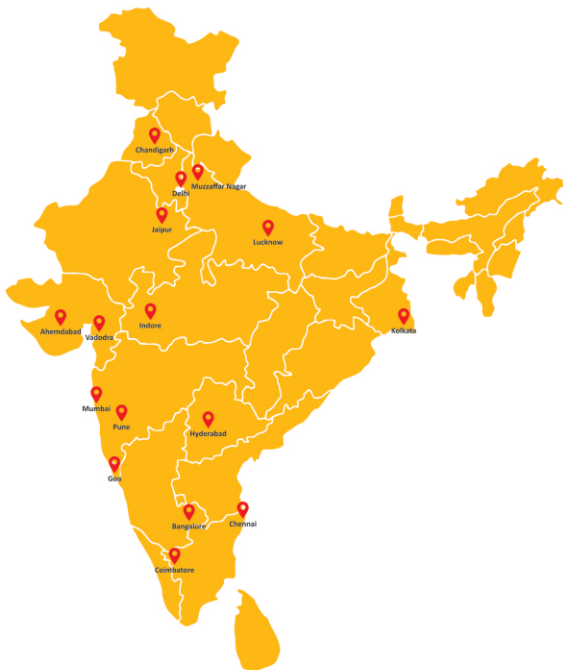



# Socomec: our innovations supporting your energy performance

1 independent manufacturer

3,600 employees worldwide

10 % of sales revenue dedicated to R&D

400 experts dedicated to service provision

## Your power management expert



POWER SWITCHING



POWER MONITORING



POWER CONVERSION



ENERGY STORAGE



EXPERT SERVICES

## The specialist for critical applications

- Control, command of LV facilities
- Safety of persons and assets
- Measurement of electrical parameters
- Energy management
- Energy quality
- Energy availability
- Energy storage
- Prevention and repairs
- Measurement and analysis
- Optimisation
- Consultancy, commissioning and training

## A worldwide presence

12 production sites

- France (x3)
- Italy (x2)
- Tunisia
- India
- China (x2)
- USA (x3)

28 subsidiaries and commercial locations

- Algeria • Australia • Belgium • China • Canada
- Dubai (United Arab Emirates) • France • Germany
- India • Indonesia • Italy • Ivory Coast • Netherlands
- Poland • Portugal • Romania • Singapore • Slovenia
- South Africa • Spain • Switzerland • Thailand
- Tunisia • Turkey • UK • USA

80 countries

where our brand is distributed

## Manufacturing facility

Socomec India Private Limited.  
756 Pace City II  
Sector 37  
Gurgaon - 122 001  
Haryana  
Tel: +91 124 4562700, 4597803  
Fax: +91 124 4562733  
CIN: U00000HR1999PTC038504

## Regional & resident offices

Ahmedabad : +91 8939008184, +91 9727753931  
Bengaluru : +91 9886323448, +91 9972578171  
Chennai : +91 9940147003 +91 9176611256  
Cochin : +91 8939550688, +91 9745012322  
Coimbatore : +91 8939550688, +91 9500092236  
Hyderabad : +91 9642528800, +91 9959444277  
Indore : +71 9827674469

Kolkata : +91 7550078077, +91 8697709095  
Mumbai : +91 9987052602, +91 8879791802  
New Delhi : +91 9953595413, +91 9958591713  
Pune : +91 8793144968, +91 9032836213  
Trivandrum : +91 9032836213  
Vaddara : +91 9099947988  
Vijaywada : +91 9032836213



## SOCOME INNOVATIVE POWER SOLUTION PVT. LTD.

B1, II Floor  
Thiru-Vi-Ka Industrial Estate  
Guindy, Chennai - 600 032  
Tel: +91 44 3921 5400 / 5423 / 5466  
Mob: +91 9711229993, +91 9790968731  
info.in@socomec.com

## YOUR DISTRIBUTOR / PARTNER

[www.socomec.co.in](http://www.socomec.co.in)

