


Solutions for Power, Control, Safety
& Energy Efficiency

January
1st 2019

When **energy** matters

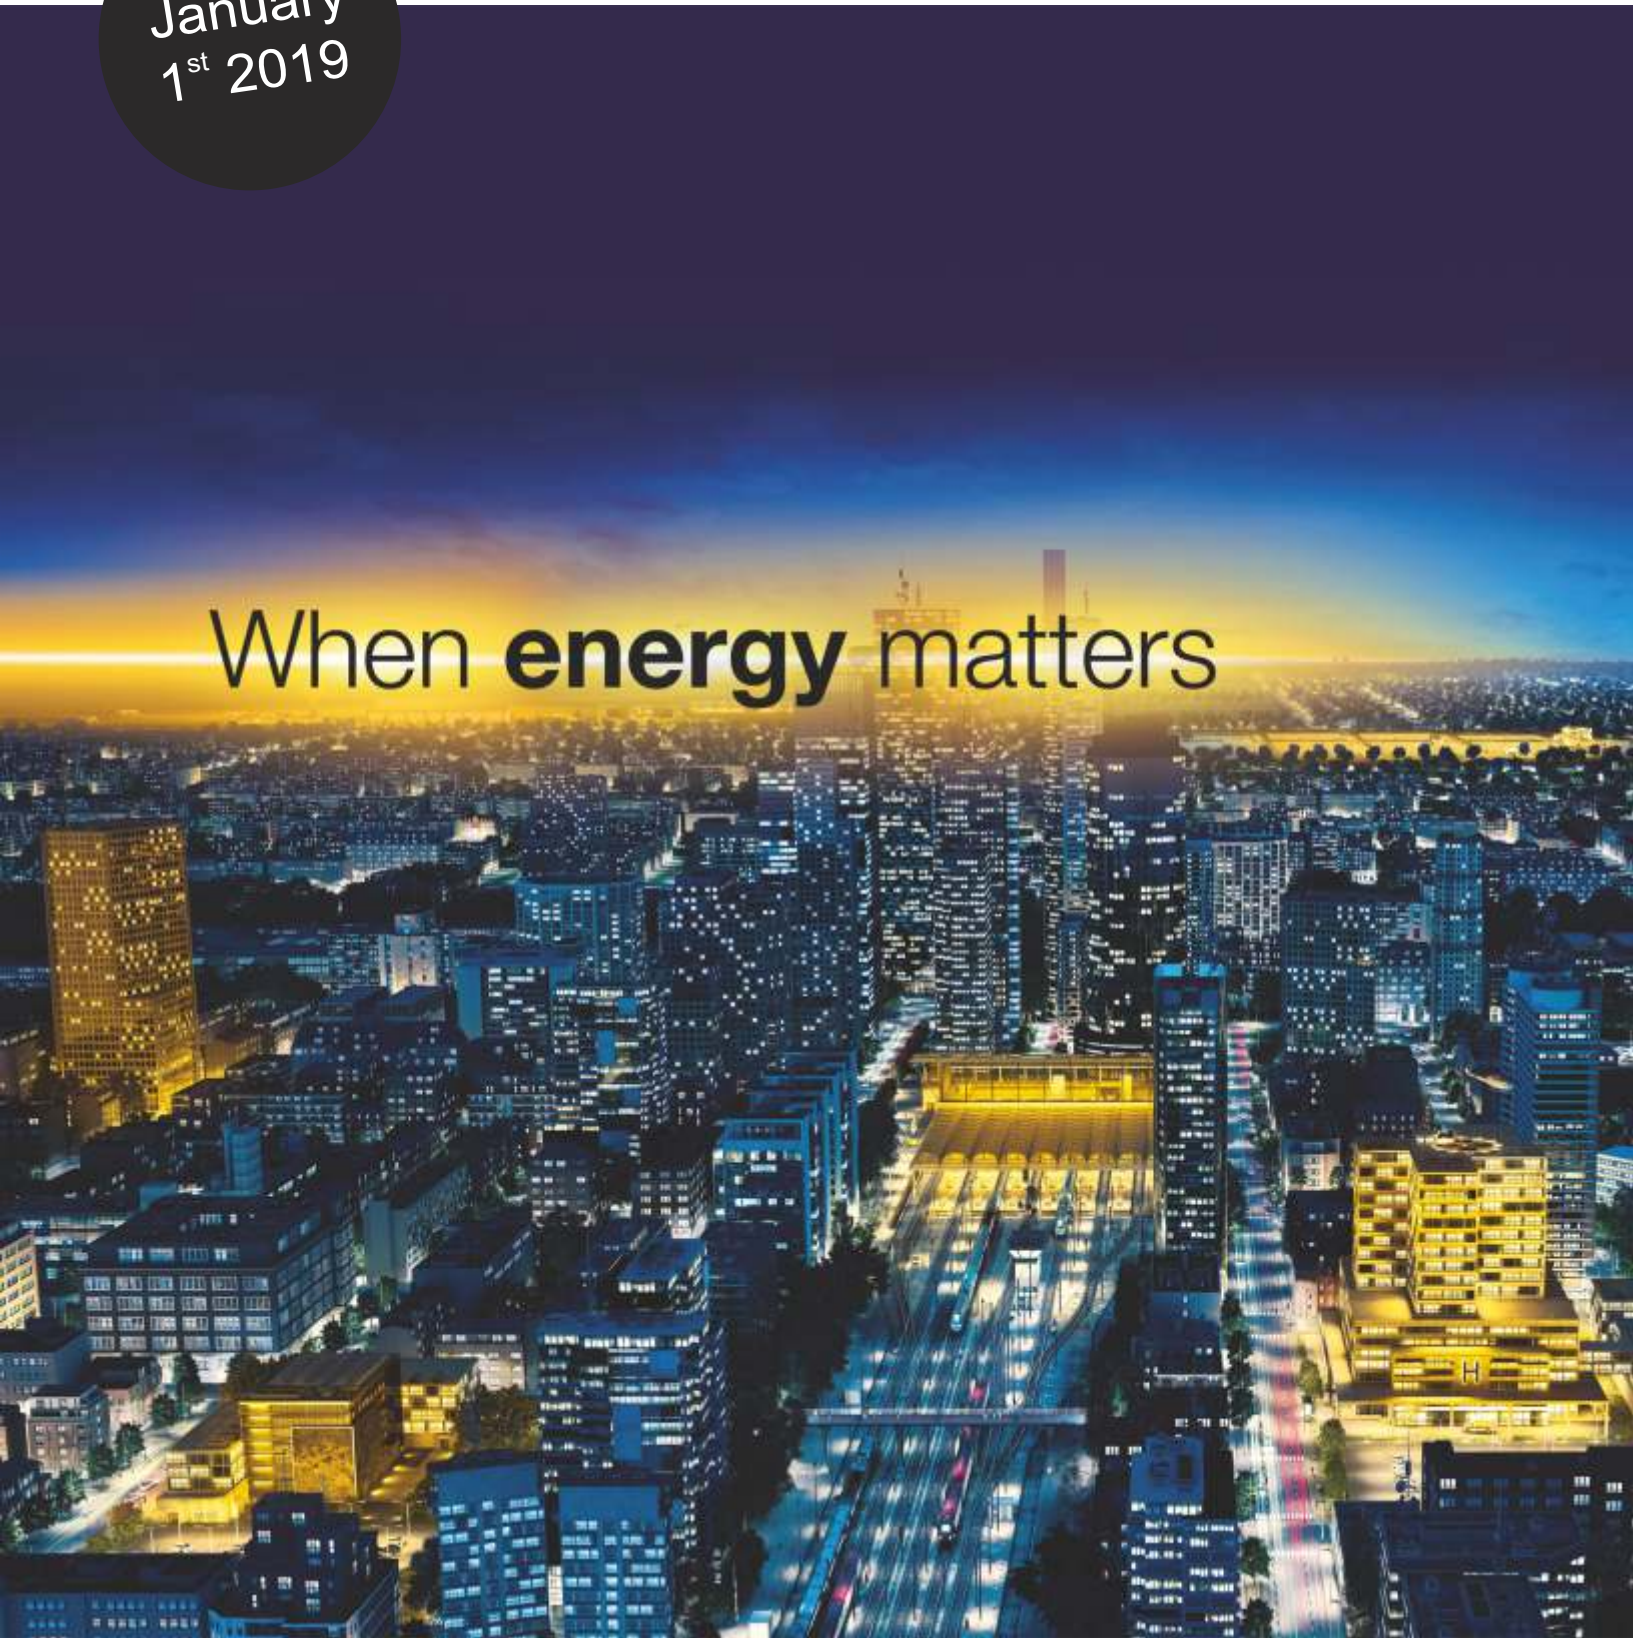

When **energy** matters

On Load Manual Transfer Switches for source changeover applications



SIRCOVER from 63 to 3200 A

Benefit from IEC 60947-6-1 & IS/IEC 60947-3 certified Class PC Transfer Switching Equipment that is one of the most widely used class of TSE, to ensure high power availability to the load:

- Globally proven robust range of MTSE for maximum reliability & peace of mind
- Reliable and easy to use with fail-safe mechanical interlocking in all positions
- Optimised electrical performance – Designed for inductive (motor) loads
- Maintenance free – Unique Lateral movement design with self cleaning contacts ensure high performance and power availability.
- Three stable mechanically held positions – Immune to voltage drops, shocks or vibrations, securing the loads against disturbance and network perturbation
- Padlocking possible in all 3 positions – Ideal for safe downstream maintenance
- Distinctly marked position indication – clearly visible on the Handle and Mechanism
- Easy to upgrade an MTSE to an RTSE or ATSE – Just 4 screws to motorise

SIRCOVER are available with direct or external handle kits (which is rugged and ergonomic) as well as enclosed in a metal enclosure. Top and bottom cable extension boxes are available to suit any of your installation and cabling requirements.


OTHER PRODUCTS



SIRCO
Manually operated
LBS available for open
execution as well as enclosed.
From 63 - 5000A



Safety enclosures
Normal atmospheres
steel enclosure.
From 50 to 630 A

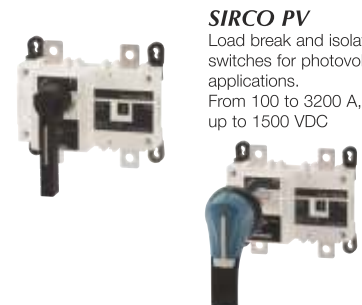

SIRCO PV
Load break and isolation
switches for photovoltaic
applications.
From 100 to 3200 A,
up to 1500 VDC









Load Break Switches

SIRCO

Conforms to IS/IEC 60947-3 up to AC23A¹, Front operated 3 or 4 pole 415 V, 50 Hz.

SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> • Switch • Interphase barriers from frame B3 and above • Direct Handle 		<ul style="list-style-type: none"> • Switch • Interphase barriers from frame B3 and above • External Handle • Extension Shaft 200mm 		<ul style="list-style-type: none"> • Enclosure • Switch • Interphase barriers from frame B3 and above • External Handle • Extension Shaft 		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	26K13012A	4075	26K23012A	4432	26E13012A	5844	26E10002A	1350
	160A		26K13016A	5160	26K23016A	5517	26E13016A	7074		
	200A CD		26K13019A	5359	26K23019A	5715	26E13019A	7273		
B4	200A		26K13020A	5862	26K23020A	6219	26E13020A	7420	26E10003A	2088
	250A		26K13025A	7618	26K23025A	7975	26E13025A	9679		
	315A CD		26K13030A	7677	26K23030A	8035	26E13030A	9758		
B5	400A CD		26K13039A	9547	26K23039A	9904	26E13039A	13541	26E10004A	2661
	315A		26K13031A	8203	26K23031A	8560	26E13031A	10944		
	400A		26K13040A	11400	26K23040A	11757	26E13040A	14953		
	500A		26K13050A	12503	26K23050A	12859	26E13050A	16472		
B6	630A		26K13063A	13742	26K23063A	14100	26E13063A	17913	-	-
	800A CD		26K13079A	16273	26K23079A	16868	-	-		
	800A	26K13080A	18680	26K23080A	19275	26E13080A	24328			
B7	1000A	26K13100A	31297	26K23100A	31892	26E13100A	39072	26E10006A	7825	
	1250A CD	26K13124A	35720	26K23124A	36316	-	-			
B8	1250A	26K13125A	42779	26K23125A	43374	26E13125A	54324	26E10007A	9917	
	1600A	26K13160A	57759	26K23160A	58354	26E13160A	71600			
	1800A	26K13180A	63702	26K23180A	64297	-	-			
B2*	2000A	26K13200A	71711	26K23200A	72901	-	-	-	-	
	2500A	26K13250A	98902	26K23250A	100093	-	-			
B3	3200A	26K13320A	132652	26K23320A	133843	-	-	-	-	
	63A	26K14006A	2314	26K24006A	2641	26E14006A	3268			
	100A	26K14010A	3969	26K24010A	4296	26E14010A	5119			
B4	CD125A	26K14011A	4342	26K24011A	4669	26E14011A	6051	26E10001A	794	
	125A	26K14012A	4794	26K24012A	5215	26E14012A	6984			
	160A	26K14016A	6070	26K24016A	6490	26E14016A	8405			
B5	200A CD	26K14019A	6304	26K24019A	6724	26E14019A	8638	26E10002A	1350	
	200A	26K14020A	6896	26K24020A	7316	26E14020A	8874			
	250A	26K14025A	8962	26K24025A	9383	26E14025A	11443			
B6	315A CD	26K14030A	9032	26K24030A	9453	26E14030A	11533	26E10003A	2088	
	400A CD	26K14039A	11232	26K24039A	11939	26E14039A	15647			
	315A	26K14031A	9651	26K24031A	11652	26E14031A	12812			
B7	400A	26K14040A	13411	26K24040A	13831	26E14040A	17385	26E10004A	2661	
	500A	26K14050A	14708	26K24050A	15129	26E14050A	19098			
	630A	26K14063A	16167	26K24063A	16587	26E14063A	20759			
B8	800A CD	26K14079A	19144	26K24079A	19845	-	-	-	-	
	800A	26K14080A	21977	26K24080A	22677	26E14080A	28325			
	1000A	26K14100A	36820	26K24100A	37520	26E14100A	45295			
B9	1250A CD	26K14124A	42024	26K24124A	42724	-	-	-	-	
	1250A	26K14125A	50328	26K24125A	51028	26E14125A	62574			
	1600A	26K14160A	67951	26K24160A	68651	26E14160A	82493			
B10	1800A	26K14180A	74943	26K24180A	75643	-	-	-	-	
	2000A	26K14200A	84366	26K24200A	85766	-	-			
	2500A	26K14250A	116355	26K24250A	117756	-	-			
B11	3200A	26K14320A	156061	26K24320A	157462	-	-	-	-	

CD - Compact design

1) Please refer technical literature for exact technical characteristics


* Phase Barrier & Shaft is not available in frame B2

SIRCO Accessories



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)
B2	42990001A	327	NA	-	26091020A	151	26092020A	250
B3	26995042A	327	14212111A	1074	26990031A	374	26990032A	439
B4	26995052A	607	14212111A	1074	26990031A	374	26990032A	439
B5	26995052A	607	14212111A	1074	26990031A	374	26990032A	439
B6	27997012A	2421	14433111A	1634	26990031A	374	26990032A	439
B7	27997012A	2421	14433111A	1634	26990031A	374	26990032A	439
B8	27997012A	2421	14538111A	2755	26990031A	374	26990032A	439

* Handle for frames B6 to B8 are double arms handle

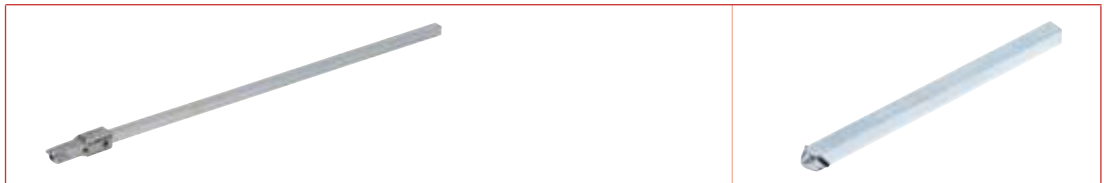

Frame	Shaft 200mm	LP (₹)	Shaft 250mm	LP (₹)	Shaft 320mm	LP (₹)
B3	14001020A	374	14001025A	467	14001032A	514
B4	14001020A	374	14001025A	467	14001032A	514
B5	14001020A	374	14001025A	467	14001032A	514
B6	14011520A	700	-	-	14011532A	943
B7	14011520A	700	-	-	14011532A	943
B8	27993015A	887	-	-	27993018A	1961



Frame	Interphase barrier - 3P	LP (₹)	Interphase barrier - 4P	LP (₹)	Spreaders - 3P	LP (₹)	Spreaders - 4P	LP (₹)
B3	29985033A	153	29985034A	221	41063016A	320	41064016A	426
B4	29985023A	181	29985024A	264	41063025A	478	41064025A	637
B5	29985013A	210	29985014A	306	41063040A(400A)	647	41064040A(400A)	863
B6	-	-	-	-	41063050A(500A)	857	41064050A(500A)	1043
B7	-	-	-	-	41063063A(630A)	894	41064063A(630A)	1192



Frame	Terminal Shroud - 3P	LP (₹)	Terminal Shroud - 4P	LP (₹)	Terminal Screen Standard - 3P	LP (₹)	Terminal Screen Standard - 4P	LP (₹)
B2	-	-	29944008A	267	-	-	-	-
B3	26943014A	568	26944014A	662	26983012A	449	26984012A	509
B4	26943021A	630	26944021A	756	26983020A	449	26984020A	509
B5	26943051A	1009	26944051A	1135	26983050A	575	26984050A	652
B6	-	-	-	-	26983080A	1154	26984080A	1308
B7	-	-	-	-	26983120A	1712	26984120A	1940
B8	-	-	-	-	26983200A	3073	26984200A	3482



Frame	Terminal Screen Wide - Top - 3P	LP (₹)	Terminal Screen Wide - Bottom - 3P	LP (₹)	Terminal Screen wide Top/Bottom - 4P	LP (₹)
B3	26983013A	539	26988013A	539	26984013A	611
B4	26983021A	539	26988021A	539	26984021A	611
B5	26983051A	690	26988051A	690	26984051A	783
B6	26983081A	1385	26988081A	1385	26984081A	1570



Manual Transfer Switching Equipment

SIRCOVER

Conforms to IEC 60947-6-1 up to AC33B¹, IS/IEC 60947-3 up to AC-23A¹,
Front operated 3 or 4 pole 415 V, 50 Hz.


SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION				
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box		
Standard Configuration Includes											
			<ul style="list-style-type: none"> Transfer switch Direct handle Bridging Bars up to 1600 A Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> Transfer switch Bridging Bars up to 1600 A Extended handle 200 mm shaft Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> Transfer switch Extended handle Bridging Bars up to 1600 A Extension shaft Interphase barriers from frame B3 and above 		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)		
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	
B3	125A	3P	41K13013A	7806	41K23013A	8171	41E13013A	11663	41E10002A	2441	
	160A		41K13016A	8572	41K23016A	8936	41E13016A	12792			
	200A		41K13020A	10416	41K23020A	10779	41E13020A	14689			
B4	250A		41K13025A	15182	41K23025A	15546	41E13025A	20324	41E10003A	2609	
	315A		41K13031A	16047	41K23031A	16411	41E13031A	21240			
	400A		41K13040A	23606	41K23040A	23969	41E13040A	31061			
B5	500A		41K13050A	25328	41K23050A	25693	41E13050A	33560	41E10005A	4118	
	630A		41K13063A	27836	41K23063A	28201	41E13063A	35913			
	CD800A		41K13079A	37652	41K23079A	38016	-	-			
B6	800A		41K13080A	45598	41K23080A	46263	41E13080A	53223	41E10006A	9115	
	1000A		41K13100A	71410	41K23100A	72017	41E13100A	94813			
	1200A		41K13120A	95387	41K23120A	95994	41E13120A	131742			
B7	1600A	41K13160A	111763	41K23160A	112369	41E13160A	178642	41E10007A	28820		
	2000A	41K13200A	174915	41K23200A	176129	41E13200A	230432				
	2500A	41K13250A	233389	41K23250A	234603	41E13250A	306511				
B8	3200A	41K13320A	319705	41K23320A	320919	41E13320A	401088	41E10008A	37095		
	63A	41K14006A	4457	41K24006A	4834	41E14006A	6944			41E10001A	1662
	100A	41K14010A	5990	41K24010A	6382	41E14010A	8851				
CD125A	41K14011A	7402	41K24011A	7850	41E14011A	11016					
B3	125A	41K14013A	9097	41K24013A	9615	41E14013A	13146	41E10002A	2441		
	160A	41K14016A	9988	41K24016A	10413	41E14016A	14415				
	200A	41K14020A	12137	41K24020A	12685	41E14020A	16645				
B4	250A	41K14025A	17691	41K24025A	18293	41E14025A	23145	41E10003A	2609		
	315A	41K14031A	18698	41K24031A	19123	41E14031A	24220				
	400A	41K14040A	27507	41K24040A	28205	41E14040A	35412				
B5	500A	41K14050A	29514	41K24050A	29938	41E14050A	38223	41E10004A	3844		
	630A	41K14063A	32437	41K24063A	32861	41E14063A	41031				
	CD800A	41K14079A	43875	41K24079A	44299	-	-				
B6	800A	41K14080A	53645	41K24080A	54427	41E14080A	60891	41E10006A	9115		
	1000A	41K14100A	82411	41K24100A	83111	41E14100A	107884				
	1200A	41K14120A	110082	41K24120A	110783	41E14120A	149165				
B7	1600A	41K14160A	130233	41K24160A	130940	41E14160A	199039	41E10007A	28820		
	2000A	41K14200A	197942	41K24200A	199316	41E14200A	262401				
	2500A	41K14250A	269346	41K24250A	270747	41E14250A	349095				
B8	3200A	41K14320A	368960	41K24320A	370360	41E14320A	459339	41E10008A	37095		

CD - Compact Design

1) Please refer technical literature for exact technical characteristics

* Phase Barrier & Shaft is not available in B2

SIRCOVER Accessories

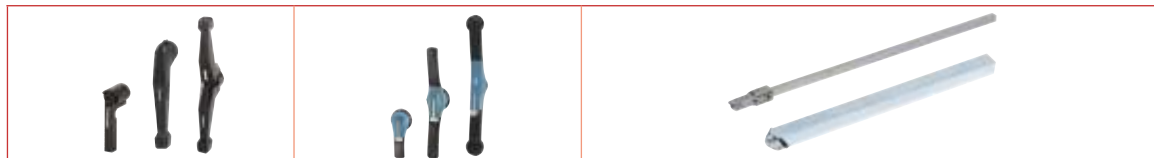

Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990002A	397	-	-	-	-	-	-
B3	41995012A	794	14212113A	1261	14001020A	374	14001032A	514
B4	41995012A	794	14212113A	1261	14001020A	374	14001032A	514
B5	41995012A	794	14212113A	1261	14001020A	374	14001032A	514
B6	27997052A	2055	14433113A	3035	14011520A	700	14011532A	943
B7	27997052A	2055	14433113A	3035	14011520A	700	14011532A	943
B8	27997012A	2421	14538113A	5136	27993015A	887	27993018A	1961

* double arms handle



Frame	Interphase barrier 3P	LP (₹)	Interphase barrier 4P	LP (₹)	1st or 2nd Aux Contact (1 NO/NC)	LP (₹)
B2	-	-	-	-	42091030A	467
B3	29985036A	306	29985038A	443	41090021A	486
B4	29985026A	364	29985028A	527	41090021A	486
B5	29985016A	422	29985018A	611	41090021A	486
B6	-	-	-	-	41090021A	486
B7	-	-	-	-	41090021A	486
B8	-	-	-	-	41090021A	486



Frame	Terminal Screen 3p	LP (₹)	Terminal Screen 4p	LP (₹)	Terminal Screen 3p wide	LP (₹)	Terminal Screen 4p wide	LP (₹)	Terminal Shroud 3P	LP (₹)	Terminal Shroud 4P	LP (₹)
B2	-	-	-	-	-	-	-	-	-	-	29944008A	257
B3	15093012A	579	15094012A	657	15093013A	695	15094013A	787	26943014A	568	26944014A	662
B4	15093025A	689	15094025A	782	15093026A	827	15094026A	938	26943021A	630	26944021A	756
B5	15093063A	1198	15094063A	1208	15093064A	1437	15094064A	1629	26943051A	1009	26944051A	1135
B6	15093080A	1387	15094080A	1523	15093081A	1664	15094081A	1886	-	-	-	-
B7	15093160A	1793	15094160A	2031	-	-	-	-	-	-	-	-



Frame	Rating	Spreaders 3P	LP (₹)	Spreaders 4P	LP (₹)
B3	125A - 200A	41063016A	320	41064016A	426
B4	250A -315A	41063025A	478	41064025A	637
		41063040A	647	41064040A	863
B5	500A	41063050A	857	41064050A	1043
		630A - CD800A	41063063A	894	41064063A



Load Break Switches

LBS

Conforms to IS/IEC 60947-3 AC-23A¹, Front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION	
		Load break switch	
Standard Configuration Includes			
		<ul style="list-style-type: none"> •Switch •Interphase barrier from 800A and above •Handle •Door Interlock •1st Aux Contact from 250A and above 	
Rating	Poles	Reference	LP (₹)
125A	4P	GL01254POI	4794
200A		GL02004POI	6896
250A		GL02504POI	8962
320A		GL03204POI	9651
400A		GL04004POI	13412
630A		GL06304POI	16167
800A		GL08004POI	21977
1000A		GL10004POI	36819
1250A		GL12504POI	50328
1600A		GL16004POI	67952
2000A		GL20004POI	84366
2500A		GL25004POI	116355
3200A		GL31504POI	156060

1) Please refer technical literature for exact technical characteristics

LBS Accessories



Rating	Direct Handle	LP (₹)	1st Aux Contact	LP (₹)	2nd Aux Contact	LP (₹)	Door Interlock Assembly	LP (₹)	Phase Barrier Kit	LP (₹)	Shaft	LP (₹)
125A	42990003GI	442	26091040GI	220	26092040GI	344	26590002GI	318	-	-	42190003GI	442
200A	42990005GI	442	26091040GI	220	26092040GI	344	26590002GI	318	-	-	42190003GI	442
250A	42990006GI	490	26091040GI	220	26092040GI	344	26590002GI	318	-	-	42190003GI	442
320A	42990007GI	638	26091040GI	220	26092040GI	344	26590002GI	318	-	-	42190003GI	442
400A	42990008GI	686	26091040GI	220	26092040GI	344	26590002GI	318	-	-	42190003GI	442
630A	42990009GI	736	26091040GI	220	26092040GI	344	26590002GI	318	-	-	42190003GI	442
800A	42990010GI	883	26091040GI	220	26092040GI	344	26590003GI	614	G89B765GI	442	42190003GI	442
1000A	42990011GI	1391	26091040GI	220	26092040GI	344	26590003GI	614	G89B765GI	442	42190003GI	442
1250A	42990011GI	1391	26091040GI	220	26092040GI	344	26590003GI	614	G89B765GI	442	42190003GI	442
1600A	42990011GI	1391	26091040GI	220	26092040GI	344	26590003GI	614	G89B765GI	442	42190003GI	442
2000A	42990011GI	1391	26091040GI	220	26092040GI	344	26590003GI	614	G89B143GI	736	42190003GI	442
2500A	42990011GI	1391	26091040GI	220	26092040GI	344	26590003GI	614	G89B143GI	736	42190003GI	442
3150A	42990011GI	1391	26091040GI	220	26092040GI	344	26590003GI	614	G89B143GI	736	42190003GI	442

* 1000A and above is having double arm handle



Changeover switches

COS

Conforms to IS/IEC 60947-3, AC-23A¹, front operated 4 pole 415 V, 50 Hz

SOLUTION		OPEN EXECUTION	
		Switch	
Standard Configuration Includes			
		<ul style="list-style-type: none"> • Switch • Handle • Bridging bars • Door Interlock Assembly • Interphase barrier from 800A and above • 1st Aux Contact from 250A and above 	
Rating	Poles	Reference	LP (₹)
125A*	4P	GC01254POI	9904
160A*		GC01604POI	10830
200A*		GC02004POI	13065
250A		GC02504POI	18842
320A*		GC03204POI	19696
400A		GC04004POI	29052
630A		GC06304POI	34179
800A		GC08004POI	49221
1000A		GC10004POI	83111
1250A		GC12504POI	110783
1600A		GC16004POI	130940
2000A*		GC20004POI	199316
2500A*		GC25004POI	270747
3150A		GC31504POI	370360

* Not available with Socomec, please consult local distributor
Rest of the ratings in this product family also available till stock last

COS Accessories



Rating	Direct Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)	Door Interlock Assembly	LP (₹)	Phase Barrier Kit Small	LP (₹)	Phase Barrier Kit Long	LP (₹)	Shaft	LP (₹)
125A	42990003GI	442	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
160A	42990004GI	442	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
200A	42990005GI	442	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
250A	42990006GI	490	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
320A	42990007GI	638	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
400A	42990008GI	686	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
630A	42990009GI	736	42091040GI	368	42092040GI	635	42590003GI	344	-	-	-	-	42190003GI	442
800A	42990010GI	883	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B143GI	736	42190003GI	442
1000A	42990011GI	1391	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B143GI	736	42190003GI	442
1250A	42990011GI	1391	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B143GI	736	42190003GI	442
1600A	42990011GI	1391	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B143GI	736	42190003GI	442
2000A	42990011GI	1391	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B491GI	932	42190003GI	442
2500A	42990011GI	1391	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B491GI	932	42190003GI	442
3200A	42990011GI	1391	42091050GI	515	42092060GI	706	42590004GI	540	G89B136GI	442	G89B491GI	932	42190003GI	442


* 1000A and above is having double arm handle



Switches Fuse Changeover

FCOS

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION	
Standard Configuration Includes		Switch	
		 <ul style="list-style-type: none"> •Switch •Bridging Bars •Direct Handle •Fuse barrier •Supply Barrier •1st Aux Contact from 250A and above 	
Rating	Poles		
125A*	4P	GF01254POI	12202
200A*		GF02004POI	22312
250A*		GF02504POI	22516
320A		GF03204POI	23257
400A*		GF04004POI	33348
630A*		GF06304POI	38920

* Not available with Socomec, please consult local distributor
Rest of the ratings in this product family also available till stock last

FCOS Accessories



Rating	Direct Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)	Door Interlock Assembly	LP (₹)
125A	42990003GI	442	42091040GI	368	42092040GI	635	42590003GI	344
200A	42990006GI	490	42091040GI	368	42092040GI	635	42590003GI	344
250A	42990006GI	490	42091040GI	368	42092040GI	635	42590003GI	344
320A	42990007GI	638	42091040GI	368	42092040GI	635	42590003GI	344
400A	42990008GI	686	42091040GI	368	42092040GI	635	42590003GI	344
630A	42990009GI	736	42091040GI	368	42092040GI	635	42590003GI	344

Rating	Fuse Barrier	LP (₹)	Phase Barrier	LP (₹)	Shaft	LP (₹)
125A	G891088GI	148	G89B595GI	74	42190003GI	442
200A	G891157GI	246	G89B596GI	191	42190003GI	442
250A	G891157GI	246	G89B596GI	191	42190003GI	442
320A	G891157GI	246	G89B596GI	191	42190003GI	442
400A	G89B594GI	344	G89B597GI	211	42190003GI	442
630A	G89B594GI	344	G89B597GI	211	42190003GI	442



Bypass changeover switches

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION			
		SIRCOVER BYPASS		BPCOS	
Standard Configuration Includes					
		<ul style="list-style-type: none"> • Switch • Interphase barrier • External Handle • Bridging Bars 		<ul style="list-style-type: none"> • Switch • Interphase barrier from 800A and above • Direct Handle • Bridging Bars • 1st Aux Contact from 250A and above 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
125A	4P	41K29013A	15960	GBP01254POI*	15960
160A		41K29016A	16771	-	-
200A		41K29019A	19051	GBP02004POI*	19051
250A		41K29025A	27535	GBP02504POI*	27535
320A		-	-	GBP03204POI*	28086
400A		41K29039A	42618	GBP04004POI*	42618
500A		41K29050A	45835	-	-
630A		41K29063A	48076	GBP06304POI*	48076
800A		-	-	GBP08004POI*	66177
1000A		-	-	GBP10004POI	113079
1250A		41K29120A	161406	GBP12504POI	161406
1600A		41K29160A	222963	GBP16004POI	222963

1) Please refer technical literature for exact technical characteristics

* BPCOS 125A to 800A not available with Socomec, please consult local distributor
Rest of the ratings in this product family also available till stock last

Accessories

Sircover Bypass



Rating	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)	1nd Aux Contact (1NO/NC)	LP (₹)
125A	14212113A	1261	14001020A	374	14001032A	514	41090021A	486
160A	14212113A	1261	14001020A	374	14001032A	514	41090021A	486
200A	14212113A	1261	14001020A	374	14001032A	514	41090021A	486
250A	14333113A	2421	14011520A	700	14011532A	943	41090021A	486
400A	14333113A	2421	14011520A	700	14011532A	943	41090021A	486
500A	14333113A	2421	14011520A	700	14011532A	943	41090021A	486
630A	14333113A	2421	14011520A	700	14011532A	943	41090021A	486
1250A	41997146A	2421	27993015A	887	27993018A	1961	41090021A	486
1600A	41997146A	2421	27993015A	887	27993018A	1961	41090021A	486

BPCOS



Rating	Direct Handle	LP (₹)	Door Interlock Assembly	LP (₹)	1st Aux Contact (1NO/NC)	LP (₹)	2nd Aux Contact (1NO/NC)	LP (₹)
125A	41990001GI	1015	42590003GI	344	42091040GI	368	42092040GI	635
200A	41990002GI	1015	42590003GI	344	42091040GI	368	42092040GI	635
250A	41990003GI	1015	42590003GI	344	42091040GI	368	42092040GI	635
320A	41990004GI	1015	42590003GI	344	42091040GI	368	42092040GI	635
400A	41990005GI	1015	42590003GI	344	42091040GI	368	42092040GI	635
630A	41990006GI	1015	42590003GI	344	42091040GI	368	42092040GI	635
800A	42990011GI	1391	42590004GI	540	42091050GI	515	42092060GI	706
1000A	42990011GI	1391	42590004GI	540	42091050GI	515	42092060GI	706
1250A	42990011GI	1391	42590004GI	540	42091050GI	515	42092060GI	706
1600A	42990011GI	1391	42590004GI	540	42091050GI	515	42092060GI	706

When it comes to transfer switching equipment, opt for reliability



from 40 to 6300 A



ATyS: a complete range of transfer switching equipment for every application from 40 to 6300 A

ATyS is remotely operated or fully automatic transfer switching equipment (TSE) assures the continuity of power to a load in a safe and reliable way.

- **Wider range of ATyS** products for different applications. With or without dual power supply, ATS controller, Communication, Software and more.
- **Tested in full compliance** with IEC 60947-6-1 & IEC 60947-3.
- **Unique lateral movement design** with self cleaning contacts ensure high performance and power availability.
- **Wide band control voltage** 166 - 332 V for motor.
- **Self diagnostic watchdog relay** for the motor and controller.
- **3-positions (I-0-II) pad lockable** with 100% manual on-load transfer feasibility with operating handle.



Safe



Plug & play



Robust



Easy maintenance

To find out more:



24/7 ExpertCare Center
1860 425 1000

[f](#) [t](#) [YouTube](#) [in](#)
www.socomec.co.in

socomec
Innovative Power Solutions





SOCOMECA INDIA PRIVATE LIMITED 756, Pace City - II Sector 37 Gurgaon -122002, Haryana, India
Tel. +91 44 3921 5466 - Mobile : +91 9711229993 - Email: info.in@socomec.com - CIN: U00000HR1999PTC038504







Remote & Automatic operated transfer switches

ATyS

Conforms to IEC 60947-6-1, IS/IEC 60947-3, 4 pole

SOLUTION		Remotely Operated							
		ATyS S		ATyS Sd		ATyS S 12Vdc		ATyS S 24Vdc	
Standard Configuration Includes									
		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars 		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars •Dual Power Supply 		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars 		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	95034004SL	18349	95134004SL	20368	95054004SL	18349	95064004SL	20387
63A		95034006SL	19372	95134006SL	21293	95054006SL	19183	95064006SL	21315
80A		95034008SL	20851	95134008SL	23145	95054008SL	20851	95064008SL	23168
100A		95034010SL	23582	95134010SL	25922	95054010SL	23353	95064010SL	25948
125A		95034012SL	25266	95134012SL	27774	95054012SL	25021	95064012SL	27801

SOLUTION		Automatic Transfer Switch Equipment (ATSE)							
		ATyS d M		ATyS t M		ATyS g M		ATyS p M	
Image = 4P B4 Frame									
Standard Configuration Includes		<ul style="list-style-type: none"> •Switch •Handle 		<ul style="list-style-type: none"> •Switch •Handle 		<ul style="list-style-type: none"> •Switch •Handle 		<ul style="list-style-type: none"> •Switch •Handle 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93234004G	33188	93444004G	34478	93544004G	51072	93644004G	On Request
63A		93234006G	35331	93444006G	36421	93544006G	53479	93644006G	On Request
80A		93234008G	37612	93444008G	38363	93544008G	55759	93644008G	On Request
100A		93234010G	37735	93444010G	39334	93544010G	55883	93644010G	On Request
125A		93234012G	42551	93444012G	43462	93544012G	60699	93644012G	On Request
160A		93234016G	51179	93444016G	52932	93544016G	69326	93644016G	On Request

* Please consult us for 2Pole ATyS M

* These products are DIN rail mountable, please refer to catalogue for more information



Remote & Automatic operated transfer switches

ATYS

Conforms to IEC 60947-6-1, IEC 60947-3, 4 pole

SOLUTION		Remotely Operated		Automatically operated					
		ATyS r		ATyS t		ATyS g		ATYS p	
Standard Configuration Includes									
		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars up to 1600A 		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars up to 1600A •Voltage Sensing Kit 		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars up to 1600A •Voltage Sensing Kit 		<ul style="list-style-type: none"> •Switch •Handle •Bridging Bars up to 1600A •Voltage Sensing Kit 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
125A	4P	95234012SL	46234	95434012SLVR	69922	95534012SLVR	88632	95734012SLVR	On Request
160A		95234016SL	48340	95434016SLVR	78217	95534016SLVR	97708	95734016SLVR	On Request
200A		95234020SL	49488	95434020SLVR	85903	95534020SLVR	106702	95734020SLVR	On Request
250A		95234025SL	61741	95434025SLVR	93588	95534025SLVR	115696	95734025SLVR	On Request
315A		95234031SL	62698	95434031SLVR	102396	95534031SLVR	126083	95734031SLVR	On Request
400A		95234040SL	78013	95434040SLVR	111205	95534040SLVR	136469	95734040SLVR	On Request
500A		95234050SL	83757	95434050SLVR	125961	95534050SLVR	154092	95734050SLVR	On Request
630A		95234063SL	99072	95434063SLVR	140717	95534063SLVR	171715	95734063SLVR	On Request
800A		95234080SL	132575	95434080SLVR	191980	95534080SLVR	234618	95734080SLVR	On Request
1000A		95234100SL	163205	95434100SLVR	201737	95534100SLVR	244128	95734100SLVR	On Request
1250A		95234120SL	202451	95434120SLVR	235777	95534120SLVR	285152	95734120SLVR	On Request
1600A		95234160SL	251269	95434160SLVR	303961	95534160SLVR	364028	95734160SLVR	On Request
2000A		95234200G	366910	95434200VR	390047	95534200VR	456146	95734200VR	On Request
2500A		95234250G	405539	95434250VR	429203	95534250VR	500784	95734250VR	On Request
3200A		95234320G	521375	95434320VR	546621	95534320VR	634662	95734320VR	On Request

* Please consult us for 3Pole ATyS range

* For rating 4000A to 6300A - Prices are available on request

ATyS Accessories



References	Description	LP (₹)
95992010G	HMI ATyS D10* compatible with C30, ATyS d, t, g, p	6004
95992020G	HMI ATyS D20* compatible with C30, ATyS p, ATyS p M	6755
15993020G	ATS CONTROLLER ATyS C20 for RTSE products	15545
15993030G	ATS CONTROLLER ATyS C30 for RTSE products	18147
13094006G	Bridging bars 40A - 125A for ATyS M	3435
13094016G	Bridging bars 160A for ATyS M	6606
13090001G	1st Auxilliary contact 40 - 160 A for ATyS M with 1 C/O contact for position I,0&II	3372
13994006G	Voltage sensing tap for ATyS M	2826
22944016G	Terminal Shrouds for ATyS M	666
48250204G	Ethernet Module with RS 485 for ATyS p/DirisA40/41 (MODBUS gateway & with Embedded Webserver)	29776
48250203G	Ethernet Module for ATyS p/Diris A40/41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	14637
48250092G	RS 485 Modbus Communication for ATyS p/Diris A40/41	3881
15992001G	2 Inputs/ Output modules for ATyS p	7004
15994001G	Dual Power Supply for ATyS S & ATyS r	11186



SO expert



www.socomec.co.in

Optimise your energy performance with Socomec

Metering

Measurement and monitoring multi-circuit system
DIRIS Digiware



Single-circuit energy meters
COUNTIS E



Measure

Measurement and monitoring multi-circuit system
DIRIS Digiware



Single-circuit measurement units
DIRIS A



Single & multifunction energy meters
MULTIS Lm35/MULTIS Lm46



Electrical network analyser
DIRIS Q800



Centralise/ Monitor/ Analyse

Communication gateway
DIRIS G



Energy management software
WEBVIEW



24/7 ExpertCare Center
1860 425 1000

f t YouTube in
www.socomec.co.in

socomec
Innovative Power Solutions

SOCOMECH INDIA PRIVATE LIMITED 756, Pace City - II Sector 37 Gurgaon -122002, Haryana, India
Tel. +91 44 3921 5466 - Mobile : +91 9711229993 - Email: info.in@socomec.com - CIN: U00000HR1999PTC038504

Measurement and energy management



COUNTIS (LCD Display)



References	Description	LP (₹)
48503019G	COUNTIS E00 1PH,Direct 32A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display	5700
48503039G	COUNTIS E03 1PH,Direct 40A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display with MODBUS	7483
48503000G	COUNTIS E10 1PH Direct 63A,Active Energy Meter with pulse output	8193
48503001G	COUNTIS E11 1PH Direct 63A,Dual tariff, Active Energy Meter with pulse output	8736
48503043G	COUNTIS E13 1PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	17680
48503047G	COUNTIS E17 1PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	29521
48503003G	COUNTIS E20 3PH Direct 63A,Active Energy Meter with pulse output	12536
48503004G	COUNTIS E21 3PH Direct 63A Dual tariff, Active Energy Meter with pulse output	13502
48503050G	COUNTIS E23 3PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	23582
48503054G	COUNTIS E27 3PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	39776
48503005G	COUNTIS E30 3PH Direct 100A,Active Energy Meter with pulse output	16089
48503006G	COUNTIS E31 3PH Direct 100A Dual tariff, Active Energy Meter with pulse output	16380
48503012G	COUNTIS E33 3PH Direct 100A,Dual tariff, Active Energy Meter with MODBUS	25445
48503008G	COUNTIS E40 3PH Active Energy Meter via CT/5A upto 6000 A	11178
48503009G	COUNTIS E41 3PH Dual Tariff Active Energy Meter via CT/5A upto 6000 A	12363
48503017G	COUNTIS E43 Dual Tariff Active Energy Meter via CT/5A upto 6000 A & with RS485	22209
48503016G	COUNTIS E63 3x1PH Direct 100A ,Active Energy Meter & with RS485	25600
48530000G	COUNTIS ECI2 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs	23728
48530001G	COUNTIS ECI3 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs+ 2 Analog inputs	27285

MULTIS "m" Series (LED/LCD display)



References	Description	LP (₹)
192J9024G	Multis I15, Ammeter, 1ph,single line 5A,class 1	1020
192J9025G	Multis I15, Ammeter, 1ph,single line 1A,class 1	1020
192J9026G	Multis I35, Ammeter, 3 ph/4w, single line, 5A class 1	1496
192J9027G	Multis I35, Ammeter, 3 ph/4w, single line,1A class 1	1496
192J9014G	Multis V15,Voltmeter, 1ph,single line,class 1	1020
192J9015G	Multis V35, Voltmeter, 3 ph/4w, single line,class 1	1496
192J9101G	Multis L25, class 1, V, A, F, 3 line display	3101
192J9114G	Multis L35, class 1, Dual source energy meter, LCD Display of P,E,PF,I,V,Thd V & I,Max I,Kva,KW,with RS 485	4579
192J9113G	Multis L42, class 1, AC Energy meter, LCD display of kWh with RS 485 & thro comm. (E,P,PF,I,V,Max I, Kva, KW)	4307
192J9112G	Multis L46,class 1, AC,3 line display,V, A, F, P,Q,S,E,Max KW with RS485 port	8486
192J9120G	Multis L50, CI-1 LCD VAF,PE with THD. Optional RS485 & IN/OUT modules	11020
192J9200G	Multis L55,class 1, AC,3 line display,V, A, F, P, PF, max kW with THD with maximum demand indication. Built in RS485 port	14053
192J9201G	Multis L56,class 0.5, AC,3 line display,V, A, F, P, PF, max kW with THD with maximum demand indication. Built in RS485 port	16093

P-Active Power(KW), Q-Reactive Power(KVAR), S-Apparent Power(KVA), E-Active Energy(KWH)

MULTIS "m" Series : New Range (LED/LCD/display)



References	Description	LP (₹)
192J9023G	Multis Im15, Ammeter, 1ph,single line Programmable 1A/5A,class 1	1173
192J9028G	Multis Im35, Ammeter, 1ph,single line Programmable 1A/5A,class 1	1683
192J9013G	Multis V15,Voltmeter, 1ph,single line,class 1 Programmable (110V to 600Vac)	1173
192J9016G	Multis V35,Voltmeter, 1ph,single line,class 1 Programmable (110V to 600Vac)	1683
192J9100G	Multis L24, class 1, V, A, F, Meter	2397
192J9104G	Multis L35, class 1, Dual source energy meter, LCD Display of P,E,PF,I,V,Thd V & I,Max I,Kva,KW	3825
192J9103G	Multis L42, class 1, AC Energy meter, LCD display of kWh + -, I reversal, Ph rotation Error & Phase absent	3621
192J9111G	Multis L45,class 1, AC,3 line display,V, A, F, P,Q,S,E,Max KW	7650

Multis Range : Available till stock lasts



Measurement and energy management

DIRIS (with LCD multiline display with accuracy class upto 0.5s)



References	Description	LP (₹)
48250010G	DIRIS A10 W/O RS485,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	12277
48250011G	DIRIS A10 With RS485,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	14579
48250200G	DIRIS A20,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, max kW, kVA, kVAR, THDi & V up to 50th row	12964
48250080G	1 OUT A20 module	3067
48250082G	RS485 A20 module	3179
48250201G	DIRIS A40,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63rd row, 3ph current bar graph	15515
48250202G	DIRIS A41,features same as DIRIS A40 + actual neutral current measurement through 4th CT	29760
48250207G	DIRIS A 60, features same as DIRIS A40 + PQM Device for Voltage Sag,Swell & Current rise recordings	57387
48250090G	2 Pulse A40/A41 module	3045
48250092G	RS 485 Modbus Communication for ATyS p/Diris A40/41	3881
48250093G	2 0/4-20mA Analog Output module A40/A41	7812
48250094G	2IN/2OUT A40/A41 module for alarm/trip purposes for Max V,I,F,P,Q,S, Temp,THD,V & I parameters	5646
48250097G	MEMORY A40/A41 module with RTC & with storage for P+,P-,Q+,Q-, last Max/Min values for V,I,F,P,Q,THD,V & I	12044
48250203G	Ethernet Module for ATyS p/Diris A40/41(MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	14637
48250204G	Ethernet Module with RS 485 for ATyS p/DirisA40/41 (MODBUS gateway & with Embedded Webserver)	29776
48250205G	PROFIBUS-DP A40 module	14637
48250206G	Temperature module - Temp indication(Internal+3 External sensors PT 100)	13717

* Upto max 4 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

** Upto max 3 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

DIRIS G

RS 485 to Ethernet communication gateways

References	Description	LP (₹)
48290300	Diris G 30 RS485/Ethernet - Webview Power Monitoring	On request
48290302	Diris G 50 RS485/Ethernet - Webview Power & Energy Monitoring	On request

DIRIS Q800



References	Description	LP (₹)
48260100	Diris Q800 Electrical network analyser with 192 x 144 mm color touchscreen for power quality/flicker/transient measurements/current waveform/Fresnel diagram	On request

DIRIS Digiware

Measurement and monitoring system for electrical installations



MONITORING DEVICES & MODULES

References	Description	LP (₹)
48290010	DIRIS B-10 RS485-MODBUS-230VAC	On Request
48290000	DIRIS B-30 RS485-MODBUS-230VAC	
48290030	DIRIS O-iod DIGITAL MODULE	
48290031	DIRIS O-iaa 0/4-20mA MODULE	
48290032	DIRIS O-it TEMPERATURE MODULE	
48290033	DIRIS O-m MODBUS RS485 MODULE	
48290034	DIRIS O-p PROFIBUS DP MODULE	
48290035	DIRIS O-b/ip BACNET MODULE	
48290036	DIRIS O_b/mstp BACNET MODULE	



POWER SUPPLY

References	Description	LP (₹)
48290120	P15 AUX SUPPLY 100-240VAC->24 VDC 15W	On Request

DIRIS G GATEWAY

References	Description	LP (₹)
48290300	DIRIS G-30 RS/ETH MONITORING	On Request
48290302	DIRIS G-50 RS/ETH MONIT+REPORT	



DISPLAY

References	Description	LP (₹)
48290200	DIRIS D-30 Single-point display	On Request
48290199	DIRIS D-40 Multi-point display - RS485 output	
48290201	DIRIS D-50 Multi-point display - Ethernet output	
48290202	DIRIS D-70 Multi-point display - Webview Webserver - Ethernet output	



BLIND INTERFACE & REPEATER

References	Description	LP (₹)
48290101	C-31 SYSTEM INTERFACE	On Request
48290103	C-32 REPEATER	



VOLTAGE SENSING MODULE

References	Description	LP (₹)
48290105	U-10 VOLTAGES INPUTS METERING	On Request
48290106	U-20 VOLTAGES INPUTS MONITORING	
48290102	U-30 VOLTAGES INPUTS ANALYSIS	

CLOSED TYPE CURRENT SENSOR

References	Description	LP (₹)
48290500	TE-18 20A SOLID CORE	On Request
48290501	TE-18 63A SOLID CORE	
48290502	TE-25 160A SOLID CORE	
48290503	TE-35 250A SOLID CORE	
48290504	TE-45 630A SOLID CORE	
48290505	TE-55 1000A SOLID CORE	
48290506	TE-90 2000A SOLID CORE	



OPEN TYPE CURRENT SENSOR

References	Description	LP (₹)
48290551	TR-10 75A/100MV SPLIT CORE	On Request
48290552	TR-16 100A/100MV SPLIT CORE	
48290553	TR-24 200A/100MV SPLIT CORE	
48290554	TR-36 600A/100MV SPLIT CORE	





Measurement and energy management

CURRENT SENSING MODULE



References	Description	LP (₹)
48290110	I-30 3xI METERING	On Request
48290111	I-31 3xI METERING + TREND	
48290112	I-60 6xI METERING	
48290113	I-61 6xI METERING + TREND	
48290128	I-33 3xI MONITORING	
48290130	I-35 3xI ANALYSIS	
48290129	I-43 4xI MONITORING 2I/2O	
48290131	I-45 4xI ANALYSIS 2I/2O	

FLEXIBLE CURRENT SENSOR



References	Description	LP (₹)
48290570	TF-55 600A ROGOWSKI	On Request
48290571	TF-120 2000A ROGOWSKI	
48290572	TF-300 6000A ROGOWSKI	

RJ45 CABLES



References	Description	LP (₹)
48290181	RJ45-0.32 feet / 0.10m CABLE	On Request
48290188	RJ45-0.64 feet / 0.20m CABLE	
48290182	RJ45-1.64 feet / 0.50m CABLE	
48290183	RJ45-3.28 feet / 1m CABLE	
48290184	RJ45-6.56 feet / 2m CABLE	
48290186	RJ45-16.4 feet / 5m length CABLE	
48290187	RJ45-32.8 feet / 10m length CABLE	
48290185	RJ45 cables for BUS Digiware 164 feet / 50 m + 50 connectors	

RJ12 CABLES



References	Description	LP (₹)
48290580	RJ12 3x0.1m CABLE	On Request
48290581	RJ12 3x0.2m CABLE	
48290582	RJ12 3x0.3m CABLE	
48290583	RJ12 3x1m CABLE	
48290584	RJ12 3x2m CABLE	
48290585	RJ12 4x0.1m CABLE	
48290586	RJ12 4x0.2m CABLE	
48290587	RJ12 4x0.3m CABLE	
48290588	RJ12 4x1m CABLE	
48290589	RJ12 4x2m CABLE	
48290590	RJ12 6x0.1m CABLE	
48290591	RJ12 6x0.2m CABLE	
48290592	RJ12 6x0.3m CABLE	
48290593	RJ12 6x1m CABLE	
48290594	RJ12 6x2m CABLE	
48290595	RJ12 3x0.5m CABLE	
48290596	RJ12 4x0.5m CABLE	
48290597	RJ12 6x0.5m CABLE	
48290602	RJ12 1 cable of 16.6ft/5m	
48290603	RJ12 1 cable of 32.8ft/10m	
48290601	RJ12 1 Cable of 164ft/50m and 50 connectors	

ACCESSORIES

References	Description	LP (₹)
48290049	SEALING KIT DIRIS B30	On Request
48290050	USB CONFIGURATION CABLE	
48290180	END LINE RESISTANCE Rj45	
48290598	SPLICE PLATE x30	
48290599	CT/5A to 100 MV ADAPTOR	
48290600	SEALABLE COVER x20	
48290280	RJ9 1x1,5m	
48290281	RJ9 1x3m	

SOCOMEK India

General terms and conditions

1. PRICES

All Prices are mentioned in Indian Rupees. Prices are subjected to change without any prior notice and will be applicable as prevailing at the time of Dispatch. This Price list is effective from January 1st 2019 and supersedes any previous price list.

2. TAXES & DUTIES

The prices are exclusive of all taxes.

We will charge applicable Goods and Services Tax ('GST') on our supplies.

In the event of variations in rate of tax, rules and/or method of assessment under the GST, the prices will be adjusted accordingly.

It will be the responsibility of customer to communicate its correct GSTIN to the Company. Company will not be responsible in case incorrect GSTIN is communicated to us and tax is deposited by us on GSTIN available in Company's record.

3. WARRANTY

The Company warrants the goods against all proven defects or hidden defects in design and manufacturing. The period of warranty is 12 months from date of invoicing or 18 months from date of manufacturing. The warranty shall be strictly limited to Socomec products and does not extend to the equipment within which these products may be integrated or not to the performance of such equipment. The Company's warranty shall be limited, in its discretion, to the repair or replacement at its expense in its factory of all part of the goods recognized as defective. Defective items replaced free of charge shall be made available to the company and shall become its property. The warranty shall not be applicable:

- 3.1 In the event that the defect is due to the material supplied by the buyer, or due to design imposed by it.
- 3.2 In the event of damage or accident due to the transport or arising from negligence, defective installation, supervision or maintenance by the buyer or a third party.
- 3.3 In the event of use, installation or storage of the goods in abnormal conditions which are not in compliance.
- 3.4 In the event of any changes, adjustments or repairs carried out by buyer without express agreement of the company.

The warranty does not cover the replacement or repair of items which are due to the fault of the buyer or third party.

Socomec: our innovations supporting your energy performance

1 independent manufacturer

3,200 employees worldwide

10 % of sales revenue dedicated to R&D

400 experts dedicated to service provision

Your power management expert



POWER SWITCHING



POWER MONITORING



POWER CONVERSION



EXPERT SERVICES

The specialist for critical applications

- Control, command of LV facilities
- Safety of persons and assets
- Measurement of electrical parameters
- Energy management
- Energy quality
- Energy availability
- Energy storage
- Prevention and repairs
- Measurement and analysis
- Optimisation
- Consultancy, commissioning and training

A worldwide presence

8 production sites

- France (x3)
- Italy
- Tunisia
- India
- China (x2)

27 subsidiaries

- Australia • Belgium • China • France
- Germany • India • Italy • Netherlands
- Poland • Romania • Singapore
- Slovenia • Spain • Switzerland • Thailand
- Tunisia • Turkey • UK • USA

80 countries

where our brand is distributed

INDIA CORPORATE OFFICE

B1, II Floor
Thiru-Vi-Ka Industrial Estate
Guindy, Chennai - 600 032
Tel: +91 44 3921 5400 / 5466
Mob: +91 9711229993, +91 9940633654
info.in@socomec.com
CIN: U31200TN2006PTC060156



MANUFACTURING FACILITY

756 Pace City II
Sector 37
Gurugram - 122 001
Haryana
Tel: +91 124 4562700, 4597803
Fax: +91 124 4562733
CIN: U00000HR1999PTC038504

REGIONAL & RESIDENT OFFICES

Ahmedabad : +91 8939008184, +91 9727753931
Bengaluru : +91 9886323448, +91 9972578171
Chandigarh : +91 9023154784
Cochin : +91 8939550688, +91 9745012322
Coimbatore : +91 8939550688, +91 9003032012
Hyderabad : +91 9642528800, +91 9959444277
Indore : +91 9827674469
Kolkata : +91 7550048077, +91 8697709095
Lucknow : +91 9711029289
Mumbai : +91 8879791802, +91 9987052602
New Delhi : +91 9953595413, +91 9958591713
Pune : +91 9987946398, +91 9987052604
Trivandrum : +91 9020179364
Vadodara : +91 8939008184
Vijayawada : +91 9515100473

HEAD OFFICE

SOCOMECC GROUP

SAS SOCOMECC capital 10633100 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex
Tel. +33 3 88 57 41 41 - Fax -33 3 88 57 78 78
info.scp.isd@socomec.co.in

YOUR DISTRIBUTOR

www.socomec.co.in

